

# TIM JR 3/12-3/16 USER MANUAL





# FULL PART LIST:

1. 12" or 16" bass drum head x 2 pcs
2. 12" or 16" bass drum shell x 1 pc + hoop x 2 pcs
3. Assembled 8" tom-tom x 1 pc
4. Assembled 10" snare drum x 1 pc
5. Seat of drum throne x 1 pc
6. 8" Cymbal x 1 pc
7. Drum pedal carton:
  - a. Beater x 1 pc
  - b. Pedal x 1 pc
8. Spare part carton:
  - a. Drum sticks x 1 pair
  - b. Tom-tom holder x 1 pc
  - c. Cymbal stand x 1 pc
  - d. Snare drum stand x 1 pc
  - e. Feet section of drum throne x 1 pc
  - f. Bass drum foot x 2 pcs
  - g. Bass drum lug x 8 pcs + spacer x 8 pcs
  - h. Drum key x 1 pc

# a. Bass Drum



Place the head with logo on the front side of the bass drum.  
Place the hoop onto the drum head.



Screw the tension rod to the lug.  
NOTE: DO NOT FULLY TIGHTEN



Repeat the same procedure on the other side until all rods are half screwed



Use the drum key to tune the tension rod.  
*Note: Do not fully tighten one rod at a time. Please tune rods in the diametrical order as above. Repeat several times until the tension of each rod is equal. The higher tension you tune, the higher pitch it would sound*




Insert the legs to the leg bracket and tighten



## b. Snare Drum

1

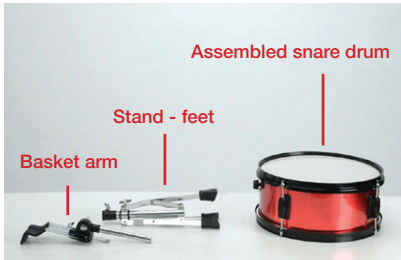

2

Pull open legs and tighten




Insert the basket arm to appropriate height and tighten

3



4

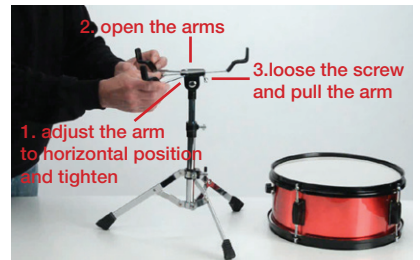

Place the snare drum on basket

5



6

You may adjust the snare by tuning the knob



## c. Tom-tom & Cymbal arm & Pedal

Insert the tom-tom holder to the holder bracket and tighten



Place the 8" tom-tom on the other side of the holder and tighten



Insert the cymbal arm to the holder bracket and tighten



1. Unscrew the cymbal lock and leave single felt on the holder  
2. Place the cymbal on the single felt



1. Place the cymbal between 2 felts.  
2. Place the spacer on top of the felt.  
3. Lock the cymbal




1. Insert the beater to the bracket  
2. Connect the pedal to the bass drum and tighten



## d. Drum Throne

Insert the tom-tom holder to the holder bracket and tighten

1

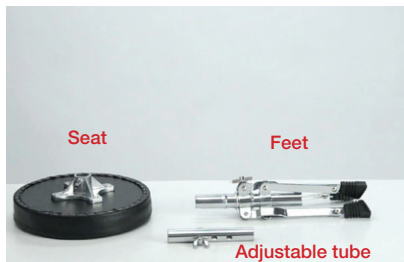

Pull open the legs and tighten

2



Set the throne to appropriate height and tighten

3



Fit seat to the stand and tighten

4



