

ATEM Mini Pro ISO



Affordable live switcher with 4 standards converted HDMI inputs, USB webcam out, audio mixer with EQ and dynamics, 2D DVE, transitions, green screen chroma key, 20 stills for titles and much more! ATEM Mini Pro also includes recording to USB disks in H.264 format, a built in hardware streaming engine for YouTube Live, Facebook, Twitch and more, plus multiview to see all cameras on a single monitor. Plus with the ATEM Mini Pro ISO model you also get recording of 5 streams including all input as clean feeds for editing, plus a DaVinci project file for fast edit turnaround and Blackmagic RAW file relinking for finishing in Ultra HD.

£405

Connections

Total Video Inputs

4

Total Outputs

2

Total Aux Outputs

1

Total Audio Inputs

2 x 3.5mm stereo mini jack.

Total Audio Outputs

None, embedded audio only.

Timecode Connection

None

HDMI Video Inputs

4 x HDMI type A, 10-bit HD switchable.
2 channel embedded audio.

Video Input Re-Sync

On all 4 HDMI inputs.

Frame Rate and Format Converters

On all 4 HDMI inputs.

HDMI Program Outputs


1

Ethernet

Ethernet supports 10/100/1000 BaseT for live streaming, software control, software updates and direct or network panel connection.

Computer Interface

1 x USB Type-C 3.1 Gen 1 for external drive recording, webcam out, software control, software updates and panel connection.

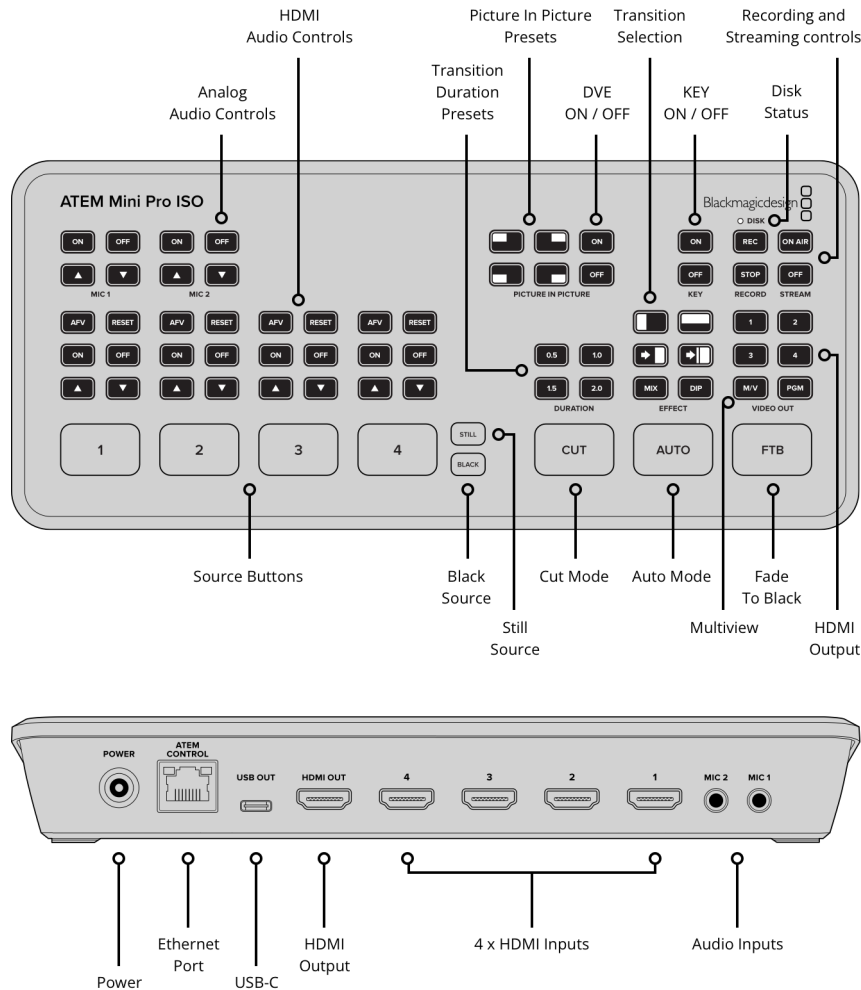

Standards

HD Video Input Standards

720p50, 720p59.94, 720p60
 1080p23.98, 1080p24, 1080p25,
 1080p29.97, 1080p30, 1080p50,
 1080p59.94, 1080p60
 1080i50, 1080i59.94, 1080i60

HD Video Output Standards

1080p23.98, 1080p24, 1080p25,
 1080p29.97, 1080p30, 1080p50,
 1080p59.94, 1080p60

Video Streaming Standards

1080p23.98, 1080p24, 1080p25,
 1080p29.97, 1080p30, 1080p50,
 1080p59.94, 1080p60

Ultra HD Video Standards

None

Video Sampling

4:2:2 YUV

Color Precision

10-bit

Color Space

Rec 709

HDMI Input Resolutions from Computers

1280 x 720p 50Hz, 59.94Hz and 60Hz
 1920 x 1080p 23.98, 24, 25, 29.97, 30,
 50, 59.94 and 60Hz
 1920 x 1080i 50, 59.94Hz and 60Hz

Colorspace Conversion

Hardware based real time.

Product Specifics

Upstream Keyers 1	Transition Keyer DVE only.	DVE with Borders and Drop Shadow 1
Downstream Keyers 1	Total Number of Layers 5	Interface Minimum monitor resolution of 1366 x 768.
Advanced Chroma Keyers 1	Pattern Generators 1	
Linear/Luma Keyers 2	Color Generators 2	

Audio

Audio Mixer 6 input x 2 channel mixer. Selectable On/Off/Audio-Follow-Video per channel plus separate gain control per channel. Level and Peak metering. Plus new Fairlight audio enhancements: Compressor, Gate, Limiter, 6 bands of parametric EQ. Master gain control.	Analog Input Unbalanced stereo Analog Input Delay Up to 8 frames Input Impedance 1.8k Max Input Level +6dBV	Mic Plug In Power Available on both 3.5mm mini jack connections. USB Audio Output Supports digital audio output over USB-C. Fully integrates with Fairlight Live. Learn More
---	--	---

Streaming

Direct Streaming Supports direct live streaming using Real Time Messaging Protocol (RTMP) and Secure Reliable Transport (SRT) over ethernet or a shared internet connection over USB-C.	Blackmagic Cloud Stream Router Supports streaming to Stream Router application in Blackmagic Cloud.
---	---

Recording

Direct Recording Video and Audio USB-C 3.1 Gen 1 expansion port can record directly to external media.	Video Recording 4 x HDMI ISO inputs as H.264 .mp4 files at up to 70Mb/s quality at the ATEM video standard with AAC audio. 1 x Program out as H.264 .mp4 file at the Streaming quality setting and at the ATEM video standard with AAC audio.	Audio Recording 6 x 2 channel audio inputs recorded as separate 24-bit 48KHz .wav files. Including 2 x analog stereo audio inputs and 4 x HDMI 2 channel embedded audio inputs.
--	--	---

Switching

Program switching recorded as a DaVinci Resolve project .drp file.

Media Format

Supports media formatted ExFAT (Windows/Mac) or HFS+ (Mac) file system.

Cloud Synchronization



Blackmagic Cloud

[Learn More](#)

Multi View Monitoring

Multi View Monitoring

1 x 10 Views including left right configurable Program/Preview, 4 HDMI inputs, Media Player, Streaming Status, Recording Status and Audio Meters.

Multi View Video Standard

HD

Media Player

Media Players

1

Media Pool Still Image Capacity

20 with fill and key.

Channels

Fill and key for each Media Player.

Media Pool Still Image Format

PNG, TGA, BMP, GIF, JPEG and TIFF.

Control

Control Panel

Built in control panel. Supports optional hardware panel. ATEM Software Control Panel for Mac and Windows included for free.

Control Panel Compatibility

Compatible with ATEM Micro Panel, ATEM 1 M/E Advanced Panels, ATEM 2 M/E Advanced Panels, ATEM 4 M/E Advanced Panels plus ATEM Camera Control Panel and ATEM Micro Camera Panel. ATEM can also be configured using Blackmagic Videohub Hardware Panel Setup utility to route sources to destinations using Videohub Smart Control Pro and Videohub Master Control Pro.

Control Panel Connection

Ethernet supports 10/100/1000 BaseT. Ethernet used for direct connection between panel and chassis or via network. ATEM Mini Pro ISO also supports direct USB-C connection. Ethernet or USB-C used for updating the software.

Software

Control Panel Included

ATEM Software Control panel included free for Mac and Windows.

Software Updates

Using USB or Ethernet connection directly connected to Mac or Windows computers. Includes ATEM Setup Utility

Configuration

Most switcher configurations are set in ATEM Software Control. To set an ATEM switcher IP address, use the ATEM Setup Utility with a direct USB connection to the switcher.

Operating Systems



Mac 14.0 Sonoma,
Mac 15.0 Sequoia or later.



Windows 10 and 11.

Power Requirements

Power Supply

1 x External 12V power supply.

Power Usage

36W

Physical Specifications



Environmental Specifications

Operating Temperature	Storage Temperature	Relative Humidity
5° C to 40° C (41° - 104° F)	-10° to 60° C (14° to 140° F)	0% to 90% non-condensing

What's Included

ATEM Mini Pro ISO
External 12V DC power supply with international socket adapters

Warranty

1 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2026, all rights reserved.
All trademarks are property of their respective owners. MSRP excludes VAT and local shipping costs.
This website uses remarketing services to advertise on third party websites to previous visitors to our site.
You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller