


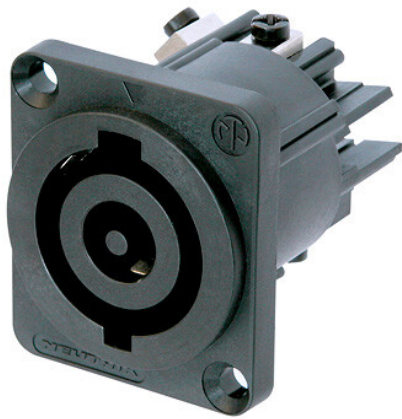

## NAC3MP-HC

powerCON 32 A chassis connector, power-in

The 32 A powerCON is an extremely robust and reliable locking single phase AC appliance cable connector for high current capacity (32 A rated). It is conceived as a non-standardized 3 pole connection system without breaking capacity to serve the needs of high power distribution systems and supplies for professional audio and lighting equipment and installations. The connectors comprise of contacts for phase, neutral and protective earth (ground) conductors rated for currents up to 32 A and for voltages up to 250V.

## Features & Benefits

- ✓ 250 V ac, 32 A single-phase (for ambient temperatures up to 35°C)
- ✓ Premating contact for protective earth
- ✓ Fast and easy locking system to prevent unintentional disengagement
- ✓ Wiring with screw-type terminals for wires 2.5 to 6.0 mm<sup>2</sup> (AWG 14 - 10)
- ✓ Extremely robust and reliable
- ✓ VDE, UL, cUL and JET approved
- ✓ IEC 62368-1 compliant up to 4000 W

## Technical Information

| Product         |           |
|-----------------|-----------|
| Title           | NAC3MP-HC |
| Connection Type | powerCON  |
| Gender          | male      |

| Electrical                               |                                  |
|------------------------------------------|----------------------------------|
| Contact resistance                       | $\leq 3 \text{ m}\Omega$         |
| Dielectric strength                      | 4 kVdc / 2.8 kVac                |
| Insulation resistance                    | $> 10 \text{ G}\Omega$ (initial) |
| Rating Europe                            | EN 61984: 32 A 250 V AC          |
| Rating USA                               | UL 1977: 32 A 250 V AC           |
| Maximal Wattage according to IEC 62368-1 | 4000 W rms                       |

| Mechanical     |                         |
|----------------|-------------------------|
| Lifetime       | $> 1000$ mating cycles  |
| Wiresize       | 2.5 - 6 mm <sup>2</sup> |
| Wiresize       | 14 - 10 AWG             |
| Wiring         | screw terminals         |
| Locking device | Quick Lock              |

| Material        |                            |
|-----------------|----------------------------|
| Contact plating | 4 $\mu\text{m}$ Ag         |
| Contacts        | Bronze (CuSn0.2)           |
| Locking element | Steel Ck67                 |
| Shell           | Polyamide (PA 6.6 25 % GR) |

| Environmental       |                              |
|---------------------|------------------------------|
| Flammability        | UL 94 V-0                    |
| Protection class    | IP 20 (mated)                |
| Safety Requirements | EN/IEC 61984                 |
| Solderability       | Complies with IEC 60068-2-20 |
| Temperature range   | -25 °C to +70 °C             |