

TEMPEST

ANALOG DRUM MACHINE

Operation Manual



Dave Smith
INSTRUMENTS

with
Roger Linn
DESIGN

TEMPEST

A N A L O G D R U M M A C H I N E

Operation Manual

by
Roger Linn, Andrew McGowan & Riley Smith

Version 1.3
March 2013

Dave Smith Instruments
1527 Stockton Street, 2nd Floor
San Francisco, CA 94133
USA

©2013 Dave Smith Instruments
www.davesmithinstruments.com



Tested To Comply
With FCC Standards
FOR OFFICE USE



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

This Class B digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations.

Cet appareil numérique de la classe B respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.

For Technical Support, email: support@davesmithinstruments.com

Table of Contents

What's a Tempest?	1
Quick Start	2
Overview of Panel Controls	2
Sounds, Beats, and Projects	3
Going Deeper	3
The Pad Function Keys	4
16 Beats	4
16 Sounds	5
16 Mutes	6
16 Time Steps	7
16 Tunings	8
16 Levels	9
Pad Options	10
Sound Bank B	10
Reverse Playback	11
The Screens Keys	12
Events Key: The Beat Events screen	13
Note Event Parameters	14
Play List	16
The Sound Controls	21
Undo Sound / Revert Sound	21
Oscillators	25
The Analog Oscillators	25
The Digital Oscillators	28
Lowpass	30
Highpass	31

Amp.	32
Envelopes.	33
A Note About Envelope Shape	35
LFO 1 & 2	35
Modulation Paths.	37
Choke and Voice Assign.	38
Beat-wide Parameters.	40
Mixer and Effects.	41
Real Time FX	42
Beat FX	42
Note FX	43
Rec/Edit Keys.	45
The Click key	45
The Undo Rec key	45
The Erase key	45
The Copy key	46
The Edit Function	47
1. Copy Sound	47
2. Initialize Sound	47
3. Rename Sound	47
4. Copy Beat	48
5. Initialize Beat	48
6. Rename Beat	48
7. Copy Bars	48
8. Insert Bars Into Beat	48
9. Delete Bars from Beat	49
10. Change Time Signature of Beat	49
11. Rename Project	49
12. Initialize Project	49
13. Rename Playlist	49
14. Copy Playlist	49
15. Initialize Playlist	50
Turn All Notes Off	50

Save/Load	51
Saving Sounds, Beats, and Projects	51
Loading Sounds, Beats, and Projects	53
Load Beat Options (<i>including Loading Sound Kits</i>)	53
Loading sounds quickly from the Pads screen	55
Exporting Sounds, Beats, and Projects	56
Importing Sounds, Beats, and Projects	59
Important: Import Notes	59
Renaming Files	60
Deleting Files	60
System Settings	61
System: General	61
System: Foot Pedals	62
System: MIDI Remote Pad Play	63
System: MIDI Polyphonic Keyboard Play	65
System: MIDI Clock	66
System: MIDI System Exclusive	66
System: BPM/Swing/Comp/Dist Sources	67
System: UI Preferences	68
Modulation Sources	70
Modulation Destinations	71
Samples	72
Support	77
Troubleshooting	77
Contacting Technical Support	77
Warranty Repair	78

Credits and Acknowledgement

For their samples, thanks to:

Angus Hewlett/FXpansion

Audio samples © 2007 FXpansion Audio UK Ltd. Used with permission.

www.fxexpansion.com

Hugo Tichborne/Goldbaby

www.goldbaby.co.nz

Haptic Audio

www.hapticaudio.com

For Sound and Beat design:

Robert Baker

Mark Camp

Kosta Cross

Carson Day

Richard Devine

Michael Dietel

Peter Dyer

Shane Etter

Andrew Everding

Troels Folmann

Reek Havok

Jeremy Jacobs

jaswho?

Nathan Kampf

James Kojac

Kevin Lamb

Joe McGinty

Chris Randall

Robert Rich

Brian Tester

Jason Ware

Special thanks also to: Wade Dawson, Rory Dow, Peter Molettieri,
and Riley Smith

And to the DSI crew: Carson Day, Chris Hector, Tony Karavidas, Mark Kono,
Andrew McGowan, Joanne McGowan and Tracy Wadley.

What's a Tempest?

Tempest is a professional drum machine that generates its sounds using six powerful analog synthesis voices. It runs an innovative, performance-oriented operating system that permits an extraordinary level of control to create, edit, arrange, and manipulate beats and sounds in real time without ever stopping play. We like to think of Tempest not just as a drum machine but rather as a new musical instrument for the real-time performance of beat-oriented music.

Here is a summary of some of Tempest's innovative features:

- Complex and rich analog voice structure: two analog oscillators with sub-oscillator, plus two digital oscillators (with a large bank of included samples), lowpass filter with audio-rate modulation, highpass filter, VCA with feedback, five envelopes, two LFOs, and eight flexible modulation paths. Though optimized for drum sounds, it excels at tuned sounds as well, and even doubles as a 6-voice analog keyboard synth. In addition to the six direct voice outputs, there are stereo mix outputs and phones outputs, plus two inputs for foot switches or expression pedals, MIDI in/out, and USB.
- The performance-oriented operating system, ninety panel controls, and graphic OLED display work together to provide a tightly integrated, fast, non-stop workflow in which nearly all creation, editing, arrangement, and manipulation operations occur in real-time without stopping play. A high priority was given to producing the highest quality human feel, including the ability to adjust swing timing in real time on playback.
- Sixteen pressure- and velocity-sensitive lit pads are arranged in a 2x8 configuration, providing easy access to all fingers and providing the ideal compromise between the popular 4x4 and 1x16 arrangements for both real-time and step programming. The pads can be used to play sixteen drumbeats, sixteen sounds (for each of two banks), sixteen sound mutes, sixteen velocity levels, or sixteen time steps (for step programming). The ROLL button permits creating drum rolls or repeated groove patterns by varying pad pressure during record, and doubles as a momentary “stutter” effect when the pads are assigned to play beats.
- Two pressure- and position-sensitive Real Time FX slide controllers permit real-time recording of note or beat-wide sound parameter changes into the drumbeat as you play. Real-time effects include stereo analog distortion and compression, plus audio delay and beat “stutter”, both produced in the sequencer in order to maintain the pure analog signal path.

Quick Start

The best way to get started is to watch our Tempest Quick Start video, presented by Roger Linn. Visit www.davesmithinstruments.com/products/tempest/ to see this and other helpful videos.

Overview of Panel Controls

Hold either Shift key to select the alternate function printed below some controls.

Connect stereo outputs or 6 direct voice outputs to mixer.

Connect power supply.

Adjust synthesis settings of last sound pad hit.

Adjust mix settings of last played sound pad.

Graphic OLED screen, 4 Soft Knobs, 1 Soft Key, screen navigation keys, Shift and Transport keys.

Set Tempo, Distortion, Compression, and Main Volume.

Use position and pressure sensitive touch strips to alter either sounds or entire beats in real-time.

The 16 pads can be used to play 16 drumbeats, 16 sounds, 16 time steps for step record, 16 tunings, 16 mutes, or 16 volume levels.

Select Bank A or B sounds, Roll for repeating notes or beat stutter, Fixed Level to defeat touch sensitivity, or Reverse to play backwards.

Select what's on the screen: the functions of the pads, a grid showing drumbeat or play list events, Sound settings, or Mixer settings. Play List plays a programmed list of beats.

Quickly erase or copy sounds or beats, undo last edit, turn click on/off, a menu of editing functions, save/load to internal flash or MIDI/USB, and system settings.

Sounds, Beats, and Projects

There are three terms that are important to know:

A Sound is a collection of all settings required to produce a drum or other type of sound when you play a pad, including settings for samples, oscillators, filters, VCA, envelopes, LFOs, and more. If the 16 SOUNDS key is pressed, you can use the sixteen pads to play the Sound in the selected Beat. After you create a Sound, you can save it as a Sound file for later reloading into another Beat.

A Beat is a collection of all settings needed to produce a drumbeat—a note sequence up to four measures of 4/4 time, thirty-two Sounds (sixteen in pad bank A and sixteen in pad bank B), mixer settings, effect settings, and more. Tempest holds sixteen beats in memory at one time. If the 16 BEATS key is pressed, you can use the sixteen pads to play the sixteen Beats that are loaded in memory. After you create a Beat, you can save it as a Beat file for later reloading into another project.

A Project is a collection of nearly everything in memory: all sixteen Beats (each containing its own thirty-two Sounds), four Play Lists, and various project-related settings including the playing tempo.

Going Deeper

There is important information throughout the manual, but pay particular attention to “The Pad Function Keys” on page 4 to gain a greater understanding of Tempest’s pad modes and how to use them, and “The Screens Keys” on page 12 to learn how to access and interact with the various types of data on the graphic display. It is highly recommended to read “Save/Load” on page 51. It is extremely important and could save you a lot of grief!

The Pad Function Keys

16 Beats

If 16 BEATS is pressed, the sixteen pads are used to play the sixteen Beats in memory. This is useful for live arrangement and manipulation of Beats during performance. One beat pad is always selected, indicated by its pad being dimly lit. To start playing a Beat, press PLAY. While playing, select another beat pad to switch to it. To stop playing, press STOP.



If the PADS key (in the Screens section) is lit, the following screen will be displayed, showing the beat assigned to each pad, plus related information and controls:

Soft Knob 1: Beat Quantize
When switching between beat pads while playing, the transition will be delayed until the next bar, 1/2 note, etc., set here.

Soft Knob 2: Swing
Varies the selected Beat's 1/16 note Swing amount from 50% (straight 1/16s) to 66% (triplet swing) and more.

Soft Knob 4: Beat Roll
Hold the Roll key for a Beat Roll, a stutter effect in which a small portion of the beat loops. This setting controls the duration of the beat roll.

BtQuant: End		Swing: 50.0%		BtRoll: 8th	
Proj: Saturday night sis				Bt: 14/Swing beat 100 bpm	
Intro	SwBt	SlOfil	4Kicks	FillBt	4hats
Busy	Break	On2&4	BisBt	Quiet	SwGrv
Pad Hold: Off		120.0		1.1.1	
16 Beats					

Project & Beat
Displays the current Project name (everything in memory) and selected Beat name.


Soft Key: Pad Hold
If on, beats play only as long as you hold down a beat pad. The Play key is also momentary.

Short Names
Short names for each of the 16 pads are shown here. You can edit these short names by using the Edit function.

16 Sounds

If 16 SOUNDS is pressed, the sixteen pads are used to play the sixteen Sounds (in either Bank A or B) of the selected Beat. This is useful for playing sounds, or for recording sounds into beats in real time.

If the PADS key (in the Screens section) is lit, the following screen will be displayed, showing what's in each pad and other useful controls:



Soft Knob 1: Quantize
When recording Beats in real time, notes are moved to the nearest 1/8, 1/16 note, etc., set here. This is also used for the Note Roll rate, plus the step size for the 'Beat Events' screen and the '16 Time Steps' pad function.

Soft Knob 2: Swing
Varies the selected Beat's 1/16 note Swing amount from 50% (straight 1/16s) to 66% (triplet swing) to 75% (extreme swing). 54-58% gives a relaxed 1/16 feel.

Soft Knob 3: Sound Type
The center area shows the Sound Types (Kick, Snare, etc.) for the 16 Sounds in the selected bank. This knob permits changing the assigned sound type.

Quant: 8th		Swing: 50.0%		Sound Type		Load Sound	
Bt: 14/Swing beat		100 bpm		Snd: A12/Boomy Kick			
Tamb	Claps	Rim	Snare	Hh0Pm	TomHi	TomMid	TomLo
Shaker	Block	SftSnr	Kick	HhTite	Ride	Crash	Sflash
Revert Snd		120.0		1. 1. 1		16 Sounds	


Selected Beat & Sound
Displays the pad number and name of the currently selected Beat and Sound.

One sound pad is always selected, indicated by being dimly lit. Press a pad to select it, or HOLD SHIFT+pad to select it without hearing its sound. The sound controls in the upper half of the panel (oscillators, filters, mixer, etc.) always apply to the selected sound.

Note the arrangement of sound types in the above screen, which is optimized for playing the drum kit sounds with your hands placed in the center of the pads. We suggest that you create your beats using this same arrangement.

16 Mutes

If 16 MUTES is pressed, the sixteen pads act as sixteen mute switches for playback of the sixteen Sounds in the selected Sound bank (A or B). This is useful for arranging the Beat's parts in real time while playing. A lit pad indicates the Sound's playback is on; an unlit pad indicates it is off. Pressing a pad toggles between on and off states.

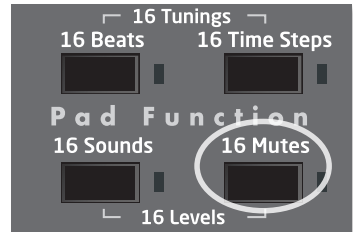

If the PADS key (in the Screens section) is lit, the following screen will be displayed, showing the assignment of each pad and related controls:

Beat & Sound
Displays the selected Beat and Sound. To change the selected sound, hold Shift while pressing the pad that holds the desired sound in the 16 Sounds screen.

Soft Knob 2: Swing
Varies the selected Beat's 1/16 note Swing amount from 50-75%.

Soft Knob 4: Beat Roll
Hold the Roll key for a Beat Roll, a stutter effect in which a small portion of the beat loops. This setting controls the duration of the beat roll.

Swing: 54%				BtRoll: 8th			
Bt: 14/Swing beat 100 bpm				Snd: A12/Boomy Kick			
Tom1	Tom2	Tom3	Snare	Hat0r	Snar2	Shaker	Tamb
Splash	Crash	Ride	Bass	HatCl	Bass2	Claps	Clave
All On		120.0		1.1.1		16 Mutes ↓	


Soft Key: All On
Pressing this soft key unmutes all 16 Sounds in the active bank.

Sound Types
The center area shows the Sound Types for the 16 loaded Sounds, which can be changed in the 16 Sounds screen.

Note: When 16 MUTES is selected, the Real Time FX sliders and sound controls affect beat-wide effects, just as they do when 16 BEATS is selected.

16 Time Steps

If 16 TIME STEPS is pressed, the sixteen pads represent sixteen time steps within the beat, useful for step programming. A lit pad indicates the presence of a note of the selected sound, and an unlit pad indicates its absence. Pressing a lit pad toggles between deleting and inserting a note (of the selected sound) at the pad's assigned location in time and at the velocity level at which the pad was struck.



If the PADS key (in the Screens section) is lit, the following screen will be displayed, showing the assignment of each pad plus related controls:

Soft Knob 1: Quantize

Same as the Quantize setting in the 16 Sounds screen, in this case it sets the Time Step size for the 16 pads to a value between 8th notes through 32nd triplets.

Soft Knob 2: See

The screen can show only a portion of the entire beat. For example, if Quantize=16th, the 16 pads show 1 bar of 4/4. Turning this knob moves between displaying (seeing) sequential time blocks within the beat. The circular icon at right appears if LoopScreen is on.

Shift + Soft Knob 2: Loop Screen

If on, the time steps shown in the screen are played in a loop.

Quant: 16th		See: 1.1.1					
Bt: 14/Swins beat 100 bpm				Snd: A12/Boomy Kick			
1.1.1	1.1.7	1.1.13	1.1.19	1.2.1	1.2.7	1.2.13	1.2.19
1.3.1	1.3.7	1.3.13	1.3.19	1.4.1	1.4.7	1.4.13	1.4.19
All Off		1200		1.1.1		16 Steps	

Selected Beat & Sound

Displays the pad number and name of the currently selected Beat and Sound.

Time Locations

This area shows the Time Location of each of the 16 pads in Bar.Beat.Tick format.

Note that it is often more useful to view the Beat Events screen while step programming your beats. See Beat Events on page 13.

16 Tunings

If 16 TUNINGS is selected (by pressing the 16 BEATS and 16 TIME STEPS keys together), the sixteen pads play the selected sound at sixteen different tunings. This is useful for playing tuned parts like bass or melody lines.



If the PADS key (in the Screens section) is selected, the following screen is displayed, showing the unique tuning for each pad plus related controls:

**Soft Knob 1:
Scale**
Offers a variety of musical scales for the 16 pads (major, minor, chromatic, etc.)

**Soft Knob 2:
Octave**
Permits the pads' tuning to be shifted up or down in octaves.

**Soft Knob 3:
Transpose**
Selects the root note of the scale.

Major				+/- Octave		Root: C2	
Bt: 14/Swing beat 100 bpm				Snd: A12/Boomy Kick			
C2	D2	E2	F2	G2	A2	B2	C3
D3	E3	F3	G3	A3	B3	C4	D4
120.0				1. 1. 1		16 Tunings	

Beat & Sound
Displays the selected Beat and Sound. To change the selected sound (the sound that plays at the 16 tunings), hold Shift while pressing the pad that holds the desired sound in the 16 Sounds screen.

Pad Tunings
Shows the tuning for each of the 16 pads in the selected scale.
Note that these won't be the actual notes played but rather serves to indicate the relative tuning between scale notes.

16 Levels

If 16 LEVELS is selected (by pressing 16 SOUNDS and 16 MUTES together), the sixteen pads play a single Sound at sixteen evenly spaced volume (velocity) levels. This is an alternative to using the pads' touch sensitivity for playing and recording dynamics.



If the PADS key (in the Screens section) is lit, the following screen will be displayed, showing the velocity level for each pad plus related controls:

Soft Knob 1: Quantize

When recording Beats in real time, notes are moved to the nearest 1/8, 1/16 note, etc., set here. This is also used for the Note Roll rate, plus the step size for the 'Beat Events' screen and the '16 Time Steps' pad function.

Soft Knob 2: Swing

Varies the selected Beat's 1/16 note Swing amount from 50% (straight 1/16s) to 66% (triplet swing) and more. 54-58% gives a relaxed 16th note feel.

Quant: 16		Swing: 50.0%					
Bt: 14/Swing beat 100 bpm				Snd: A12/Boomy Kick			
8	16	24	32	40	48	56	64
72	80	88	96	104	112	120	127
		120.0		1.101		16 Levels	

Beat & Sound


Displays the selected Beat and Sound. To change the selected sound (the sound that plays at the 16 volume levels), hold Shift while pressing the pad that holds the desired sound in the 16 Sounds screen.

Velocity Levels

Shows the velocity level at which each of the 16 pads will play the selected sound.

Pad Options

The buttons in this section provide a variety of useful tricks to get the most out of using the pads for playing both sounds and beats.

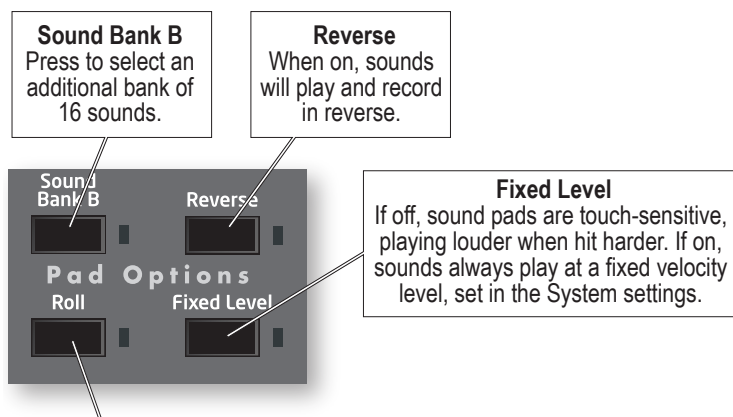

Roll

If Pad Function = 16 Sounds, 16 Tunings or 16 Volumes:

While playing, if Roll is on and a sound pad is held, repeated notes will be created at the Quantize rate

(Set in the 16 Sounds screen). Varying pad pressure varies the velocity level of the repeated notes. Use 1/32 or 1/32 Triplet quantize for rolls, or 1/16 note quantize for natural-sounding 1/16 note hi-hat parts.

If Pad Function = 16 Beats:

If Roll key is held, the beat stutters, looping a short portion until released. The roll rate of repeat is set by the Beat Roll setting in the 16 Beats screen. (Select 16 Beats and Pads.)

The Roll key is normally momentary (on while held). However, a quick press will toggle between on and off states.

Sound Bank B

Sixteen additional Sounds can be stored and accessed per Beat for a total of 32. Sounds in bank B are designated B1 through B16. Press SOUND BANK B to toggle between banks A and B.


- While holding COPY to copy a sound, use SOUND BANK B to switch between banks.
- To erase a Sound in Sound Bank B from a Beat, select SOUND BANK B before or after holding ERASE, and then hit a pad to erase that sound.

Reverse Playback

REVERSE causes Sounds—even completely analog, non-sample-based Sounds—to play in reverse by reversing the envelopes. (Sample-based Sounds also play the sample in reverse.) REVERSE is a real-time, performance control in 16 SOUNDS and 16 BEATS modes and it can also be recorded into a Beat on a per note basis.

While playing a Beat in 16 SOUNDS mode, turning REVERSE on and playing a pad will cause the Sound to play in reverse. While recording a Beat in 16 SOUNDS mode, notes recorded with REVERSE on will record and play in reverse.


Note: Reverse can also be programmed as a Note Event in the Beat Events screen and can be turned on or off for individual notes. For details about the Beat Events screen, see “Events key: the Beat Events screen” on page 13.

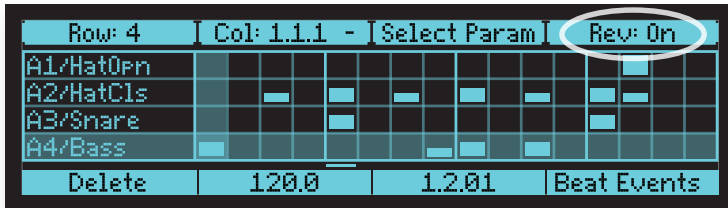

While playing a Beat in 16 BEATS mode, REVERSE causes all of the Sounds in a Beat—but not the Beat itself—to play in reverse.

The Screens Keys

Tempest's graphic OLED screen can display a variety of different types of information. The keys in this section are used to determine which information it displays.

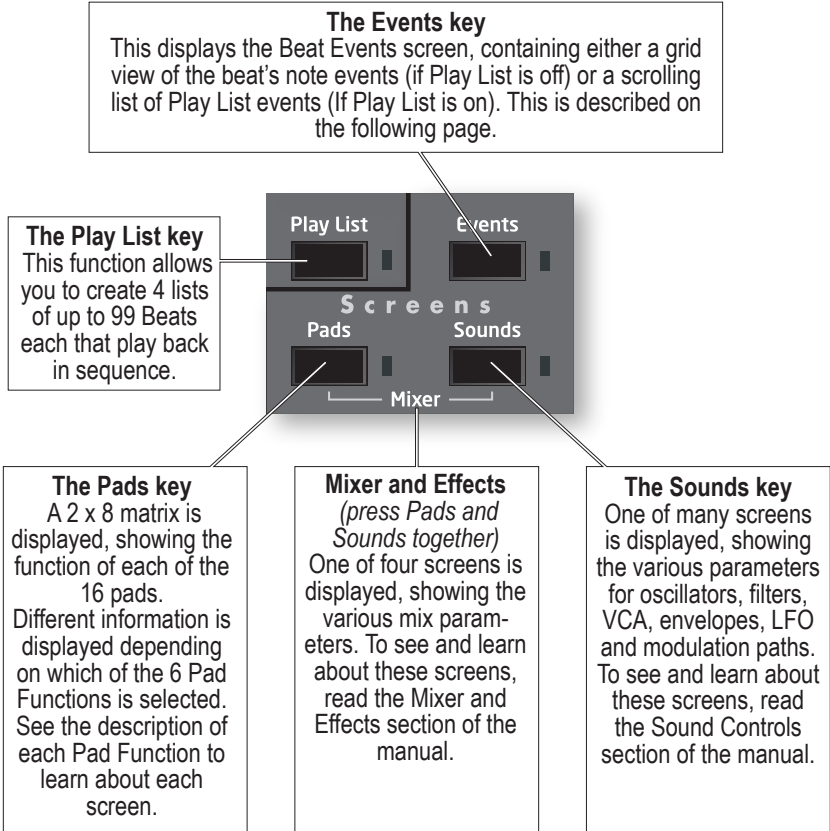

Events Key: The Beat Events screen

If the EVENTS key is pressed, the Beat Events screen will be displayed. The Beat Events screen is used for visual programming and editing of beats. This screen is displayed on page 15.

The Beat Events screen contains a 4 x 16 grid with a row for each of four Sounds in the Beat, and sixteen columns representing sixteen time locations within the Beat. A rectangle in one of the cells indicates the presence of a note event of the row's Sound at the column's time location. The height of this rectangle indicates the velocity level of the note.

The grid acts as a window into the larger beat, showing four Sounds/rows out of thirty-two, and sixteen time locations from the total Beat's length. To view the previous or next block of time, press the PAGE UP or PAGE DOWN keys. To view higher or lower rows of Sounds, turn the ROW soft knob.

To Edit a Note Event:


- Press SHIFT + turn Soft Knob 3 (Quantize) to adjust the size of each time step (column) from 8th notes to 32nd triplets.
- Use the ROW and COLUMN soft knobs to select the note's row and column.
- Use the SELECT PARAM Soft Knob to select which of the note parameters you wish to view for editing: Velocity, Duration, Tuning, Note FX1, Note FX2, Note FX3, Note FX4, Time Shift or Reverse).
- The selected parameter of the selected note will appear in the Soft Knob 4 rectangle. Edit the value with Soft Knob 4.
- To play only the displayed region in a loop, hold SHIFT and turn Soft Knob 2 to the right to turn on Loop Screen.
- The Soft Key is used either to insert a new note in an empty cell, or to delete an existing note.

Note that the Beat Events screen can be displayed while any of the six Pad Functions is selected. It is especially useful for step programming when Pad Function is set to 16 TIME STEPS.

Note Event Parameters

The nine note event parameters are described below:

- **Velocity** - NOTE VELOCITY value to be used by various modulation destinations in the synth engine (0-127).
- **Duration** - NOTE DURATION in 24 PPQN increments (parts per quarter note), used to gate the envelope generators (1-255). When ADSR envelopes are used, the DURATION determines the time period before the Release envelope phase begins.
- **Tuning** - Changes the Pitch of the note in semitones (-60 to +60).
- **FX1, FX2, FX3, FX4** - NOTE FX 1-4 directly control the NOTE FX DESTINATIONS as assigned in the Note FX menu. (See “Note FX” on page 43 for additional details).
- **Time Shift** - Tempest’s sequencer resolution is 96 PPQN. TIME SHIFT allows a note to be shifted +/- 3 parts. At 120 BPM, 1 part equals about 5.2 milliseconds.
- **Reverse** - REVERSE allows you to reverse individual notes in a Beat. Reverse causes Sounds—even completely analog, non-sample-based Sounds—to play in reverse by reversing the envelopes.

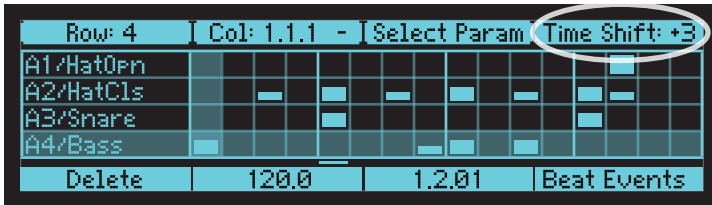

Soft Knob 1: Row

The 4 rows of the grid represent 4 of the beat's sound pads. Turn this knob (or press the Up/Down Arrow keys) to select a different row. If turned past the bottom or top of the screen, the screen scrolls up or down to reveal higher/lower sound pads.

Shift + Soft Knob 1: Assign Row


Often the 4 sounds you wish to edit aren't contiguous and therefore can't all be edited in the same screen. Turning this knob permits the selected row to be reassigned to any of the 32 sound pads.

Soft Knob 2: Column

The columns represent time locations. Turn this knob (or press the left/right arrow keys) to select a time location, shown as a bar.beat.tick number in the Soft Knob 2 rectangle. To view the previous or next block of time, press the Page Up/Down keys. The circular icon indicates the Loop Screen status.

Shift + Soft Knob 2: Loop Screen

If on, the contents of the screen plays in a loop, useful for fast editing. If on, the Loop Screen icon appears whether Shift is on or off.

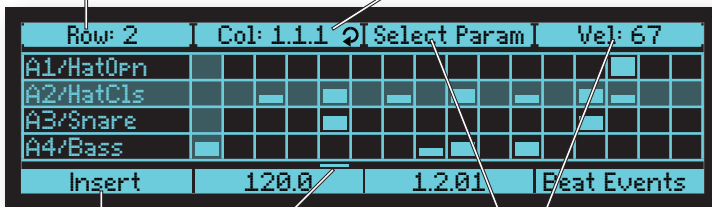

Soft Key:

Insert or Delete

If no note exists at the selected grid cell, this key inserts a new note. If a note exists in the selected cell, it deletes it.

The Play Cursor

This horizontal line moves as the beat plays, indicating the current playing location (same as the Location display) within the beat.


Soft Knobs 3 & 4: Select Param & Edit

Each note event contains 9 data: velocity, tuning, duration, FX1, FX2, FX3, FX4, time shift and reverse. To edit the note event at the intersection of the selected row and column, use soft knob 3 to select one of these 9 parameters, then use soft knob 4 to edit the current value of the selected parameter.

Shift + Soft Knobs 3&4: Quantize & Swing

Quantize sets the time resolution of the grid, from 8th notes to 32nd triplets. Triplet values show 12 columns instead of 16. This also sets the note value for real time quantize recording, Note Roll and the 16 Time Step pad function.

Play List



The Play List function enables you to create lists of beats that automatically play back in sequence. Though this feature has existed in drum machines for many years, Tempest takes it further: in addition to manually entering a list of beats, you can also create play lists by recording your live beat arrangements (switching between beat pads while playing) in real time.

Each project in Tempest contains 4 play lists, each of which contains up to 99 steps. Each step contains a beat number (1-16) and the number of bars that beat will play. Each play list can be set to either stop or loop back to an earlier step when it plays past its last step. Play lists can not be saved as a separate file, but rather are saved as part of the project when the project file is saved.

The PLAY LIST button toggles Play List mode on or off. If off, the selected beat will play when PLAY is pressed. If on, the selected Play List will play when PLAY is pressed.

The Play List screen

To view the Play List screen, press the PLAY LIST button, then press the EVENTS button. Note that if PLAY LIST is off, pressing the EVENTS key displays the Beat Events screen. If PLAY LIST is on, pressing the EVENTS key displays the Play List Events screen.

**Soft Knob 1:
Select Step**

Turning this knob changes which step is selected for editing. The selected step is highlighted. Turning the knob past the bottom or top of the screen scrolls the screen contents to reveal higher or lower numbered steps. You can also select a different step by using the Up and Down Arrow keys.

**Soft Knob 2:
Beat**

Turning this knob changes the beat number for the selected step. The pad associated with the selected beat is illuminated.

**Soft Knob 3:
Bars**

Turning this knob changes the number of bars that the selected step's beat will play.

Step	Beat	Bars	End
Play List 1/Favorite arrangement			End: Loop to Step 2
▶ 1	12/Four hihat ticks	1 bar (Bar 1)	
2	5/Basic 4-count beat	7 bars (Bar 2)	
4	3/Basic beat with fill	1 bar (Bar 9)	
Insert Step	120.0	1. 1. 1	PlayList Events

**Soft Key
Insert**

Pressing this will insert a new step into the play list before the selected step. All subsequent steps will be moved up (down on the screen) by one step to make space for the new step.

**Soft Knob 4:
End**

Turning this knob selects what will happen when the play list plays to its end. The options are Stop or Loop To Step x (any step within the play list).

If SHIFT is on, the soft key and soft knobs 3 and 4 change their function as shown below.

SHIFT ON

**Soft Knob 3:
Select List**
Turning this knob allows you to select one of the four Play Lists.

Step	Beat	Select List	RT Rec: Off
Play List: 1/Favorite arrangement			End: Loop to Step 2
1	12/Four hihat ticks	1 bar (Bar 1)	
2	5/Basic 4-count beat	7 bars (Bar 2)	
3	3/Basic beat with fill	1 bar (Bar 9)	
4	-		
Delete Step		1200	1. 1. 1 PlyList Evnts

**Soft Key
Delete**
Pressing this will delete the selected step from the play list. All subsequent steps will be moved up by one step to fill the deleted step.

**Soft Knob 4:
RT Record Off/On**
When Real-time Record is Off, Play Lists can only be created manually by entering data into the Play List screen. When RT Rec is On, you may create a Play List by recording a live beat arrangement, described on page 18. This is a System parameter so it always remains as set even after loading a new Project file.
Note: Keep this set to Off when not recording real time play lists, in order to prevent accidentally overwriting your play list steps.

The center area of the screen displays a scrolling window of 4 steps within the selected play list. Each step contains the beat number (1-16) and its name, the number of bars it will play, and the calculated start bar for that step. A triangle on the left edge of the screen indicates which step is currently playing. The high-lighted step indicates that it is selected for editing. The Location field (bottom of the screen) displays the bar.beat.tick location within the play list instead of within the beat.

Creating a Play List by Manually Entering Steps

To create a play list manually:

1. Press **PLAY LIST** to turn on Play List mode. Display the Play List screen by pressing the **EVENTS** key.
2. If the play list contains steps, either a) delete all steps one at a time [**SHIFT** + soft key], or b) select a different, empty play list [**SHIFT** + soft knob 3] or c) from the **EDIT** menu, initialize the entire play list.
3. Using the **STEP** soft knob, select step 1.
4. Using the **BEAT** soft knob, select the beat you wish to play during this step.
5. Using the **BARS** soft knob, select the number of bars you want this step to play within the play list.
6. Using the **STEP** soft knob, select the next higher step.
7. Repeat steps 4 through 6 for each additional step you wish to add to the play list.
8. Using the **END** soft knob, select either a) **STOP** or b) **LOOP TO STEP X** [any earlier step], depending on what you wish to happen when the play list plays past the last step.
9. Press **PLAY** to play your new play list.

Creating a Play List by Recording a Live Beat Arrangement

One of Tempest's performance features is the ability to switch between beats during performance by simply pressing beat pads. As an alternative method of creating a play list, Tempest can automatically record these live beat arrangements, recording each beat change and its duration into successive steps of the play list. Here's how to create a Play List in this way:

1. Press 16 **BEATS**.
2. Press **PLAY LIST** to turn on Play List mode. Display the Play List screen by pressing the **EVENTS** key.
3. Set soft knob 4 (**END**) to **LOOP TO STEP 1** so that when the new play list plays past its end, it will automatically loop back to step 1.
4. With **SHIFT** on, set soft knob 4 (**RT REC**) to **ON**, then turn **SHIFT** off.

IMPORTANT: With RT REC set to ON, when you start recording your live beat arrangement, any existing steps in the play list will be overwritten! If you're not creating a play list by recording your live beat arrangement, it's better to keep this set to OFF in order to avoid accidentally erasing your play list steps by unintentionally entering Record mode.

5. Press the beat pad that you want your play list to start with.
6. Press the RECORD button to turn Record mode on.
7. Press PLAY to start recording your live beat arrangement into the play list. The selected beat will automatically be entered into step 1 of the play list.
8. When you want to hear a different beat, press a new beat pad. Notice that the previous step's BARS duration is now set to the number of bars that the previous beat played, and the next step's BEAT field has been filled with the new beat you just selected.

Note: The new beat will start playing at the next Beat Quantize boundary. When recording live beat arrangements into play lists, if Beat Quantize is set to anything shorter than BAR, it is internally forced to BAR. This is because the play lists can change between beats only at bar boundaries.

Repeat step 8 for each additional beat change that you want your play list to contain.

During the last bar of your beat arrangement, do one of the following:

- Press STOP, then press RECORD to turn Record mode off. Press PLAY and your newly created play list will start playing from the beginning.
- Press RECORD to turn Record mode off. At the next Bar boundary, your newly recorded play list will loop back to step 1.


The Sound Controls

A Sound is a collection of all settings required to produce a drum or other type of sound when you play a pad, including samples, oscillators, filters, envelopes, LFOs, and more. This section provides a detailed description of each of these settings, and is divided into subsections for each of the principal synthesis blocks:

- Oscillators
- Lowpass Filter
- Highpass Filter
- VCA (voltage controlled amplifier)
- Envelope Generators
- LFOs (low frequency oscillators)
- Modulation paths

Many of these parameters have dedicated front panel controls, but many others are accessed only in special Sounds screens. All sound parameters can be visually edited by pressing the SOUNDS key (in the Screens section.)

There are a total of sixteen different sound parameter screens. To move between them, press the four arrow keys.



On the following two pages is a picture of all sixteen screens, with arrows showing which arrow keys to use to move between them. On subsequent pages is a detailed description of each of the parameters shown in these screens.

Undo Sound / Revert Sound

If you press **SHIFT + UNDO SND**, the selected sound will be restored to its last loaded or saved status, undoing any edits since then.

Also, if both 16 SOUNDS (in the PAD FUNCTION group) and SOUNDS (in the SCREENS group) are selected, the soft key allows you to REVERT SND. Pressing it performs the same function as **SHIFT + UNDO SND**.

If the SOUNDS key is pressed, one of the following screens appears. Use the four arrow keys to move between the screens.

Shape	Osc 1/2 Mix	Frequency	Fine Freq
Triangle	49/51	C#2	+53
Revert Snd	120.0	1. 1. 1	OSC1

Sample/Noise	Level 1	Frequency	Fine Freq
Pink Noise	87	+5.12	+5.12
Revert Snd	120.0	1. 1. 1	OSC3

LP Freq	Resonance	Audio Mod	HP Freq
80	87	34	34
Revert Snd	120.0	1. 1. 1	Filters

Volume	Feedback
71	31
Revert Snd	120.0

Attack	Decay	Amount	Peak: 0
4	47	4	0
Revert Snd	120.0	1. 1. 1	Pitch Env

Sustain	Release	Vel Am
4	47	4
Revert Snd	120.0	


Shape	Rate	Amount	Destination
Triangle	49/51	71	OSC1 Freq
Revert Snd	120.0	1. 1. 1	LF01

Edit Mod 1	Source	Amount	Destination
Mod1:	Pitch Envelope	0	Osc1 Frequency
Mod2:	Pitch Envelope	0	Osc1 Frequency
Mod3:	Pitch Envelope	0	Osc1 Frequency
Revert Snd	120.0	1. 1. 1	Mod Paths

Choke 1	Choke 2	Voice Assn	Pitchbend Amt
A03	B12	-	4 Semitones
Revert Snd	120.0	1. 1. 1	Misc


Use the four arrow keys to move between the screens.



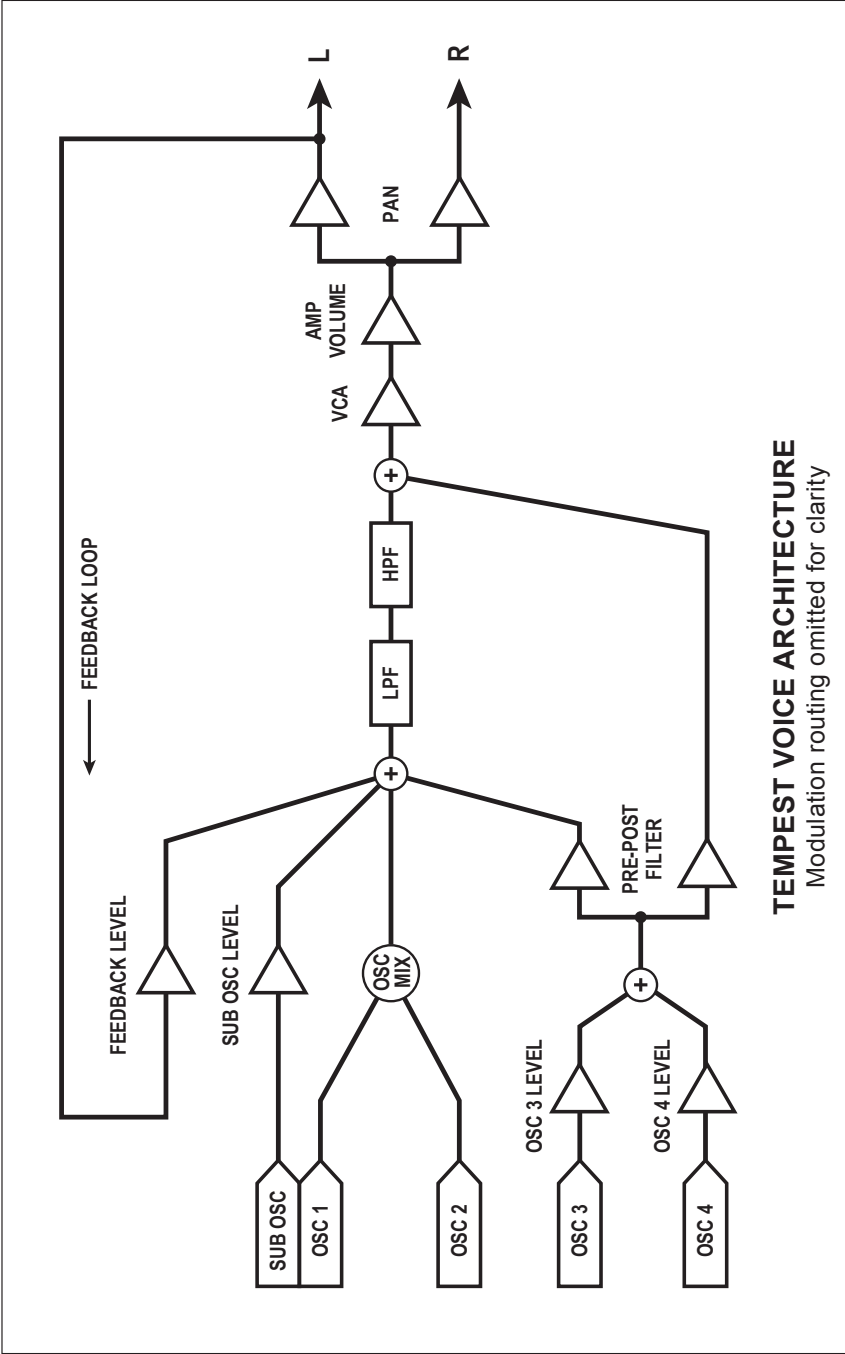

Oscillators

Tempest has four oscillators for each of its six voices. Oscillators 1 and 2 are digitally controlled analog oscillators or DCOs.

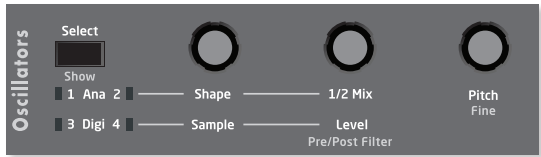


“Digitally controlled” does not mean the audio is digitally generated, just that the oscillators’ frequencies are under digital—rather than voltage—control. The audio signal path is still completely analog. The advantage of digital control is that the tuning is exceptionally stable over a ten-octave range without having to compensate for variables like temperature.

Oscillators 3 and 4 are digital and generate various sample-based sounds, including different types of noise, samples of acoustic and electronic percussion, and single-cycle waves from the Prophet VS. The digital oscillators are converted to analog and pass through the same analog sound-shaping circuitry—filters, VCAs, etc.—as the analog oscillators.

The Oscillators section contains the most commonly used controls for Tempest’s oscillators. However, there are additional parameters accessed via the display and its related controls. When the Oscillators screen is displayed, use the ◀ and ▶ keys to view all the available parameters and the ▲ and ▼ keys to switch between the different oscillators (and other edit screens).


The Analog Oscillators

Shape: Osc Off, Sawtooth, Triangle, Saw-Tri, Pulse 0% ... Pulse 99%
— Selects the oscillator waveshape.

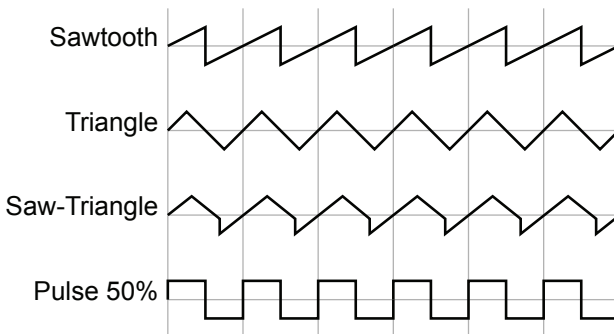

The Pulse values ranges from 0 to 99 per cent and set the pulse width or duty cycle of the Pulse wave. A value of 50 results in a true square wave with equal alternating high and low levels, as in the preceding illustration.

Increasing or decreasing the value from 50 causes the waveshape to become asymmetrical. Lower values narrow the positive-going portion of the wave, higher values widen it. At the extreme values, the pulse goes completely flat, which allows for some interesting possibilities with pulse width modulation.

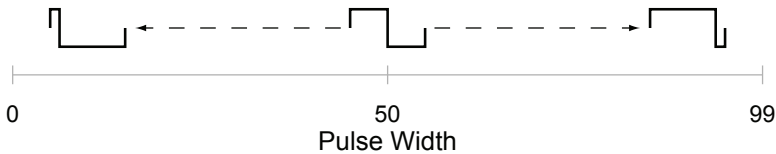


1/2 Mix: 100/0...0/100—Mixes the outputs of oscillators 1 and 2 in varying amounts. A setting of 100/0 is 100% oscillator 1 and 0% oscillator 2. A setting of 0/100 is just the opposite. A setting of 50/50 is an equal mix of both.

Pitch: C0...C10—Sets the base oscillator frequency over a 10-octave range, from 8 Hz to 8 kHz, in semitones. C3 is middle C, the first octave is 0 (C0, C#0, etc.), the second octave is 1 (C1, C#1, etc.), and so on. Note that noise samples cannot be tuned.

Fine: -50...+50—Fine tune control with a range of a quarter tone up or down. Zero is centered. Steps are in cents (50 cents = $\frac{1}{2}$ semitone).

Glide: 0...127—Sets the oscillator glide (portamento) rate. Glide is set independently for each oscillator. Low values are faster. See also Glide Mode.

Sync 2 >1: Off, On—Turns oscillator hard sync on. With sync on, whenever oscillator 2 resets, oscillator 1 is forced to restart.

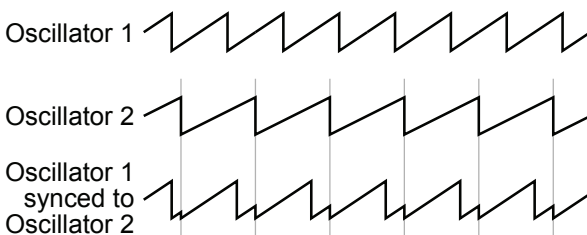

Sub Osc: 0...127—Controls the level of a square wave pitched one octave below oscillator 1.

Osc Slop: 0...5—The amount of random oscillator frequency tuning slop. The analog oscillators in Tempest are very accurate, and will not drift. This works great for accurate sounds, and allows precise de-tuning. **OSCILLATOR SLOP** allows subtle amounts of frequency drift. For larger amounts, use a random LFO.

Glide Mode: FixRate, FixRate A, FixTime, FixTime A—Determines how the oscillators respond when **GLIDE** is on.

- **FixRate:** The time to transition between notes varies with the interval between the notes; the greater the interval, the longer the transition time. The glide rate is fixed.
- **FixRate A:** The same as FixRate, but glide is only applied when playing legato. That is, glide only occurs when a note is held until the next note is played. This effectively allows glide to be turned on and off just by playing staccato or legato.
- **FixTime:** Glide is set to a fixed time, regardless of the interval between notes.
- **FixTime A:** The same as FixTime, but glide only occurs when playing legato.

Key Follow: Off, On—Turns keyboard tracking off or on for oscillator 1 or 2. When off, the oscillator plays at its base pitch and will not transpose when played from the pads or via MIDI.

Wave Reset: Off, On—When off, the oscillator is free-running and may be at any point in its cycle when the voice is gated on. Most analog synthesizers behave this way. The most noticeable effect is that the attack may vary slightly at very fast settings, adding a slight, variable click that can be desirable for some sounds. When **WAVE RESET** is on, the oscillator is restarted—reset to the zero crossing at the start of its cycle—every time a note is gated on.

The Digital Oscillators

Sample: Off, sample name 1, sample name 2, ...—Tempest contains several hundred sampled sounds, including different types of noise, acoustic drums and percussion, classic analog and digital drum machines, effects, and the single-cycle waves from the Prophet VS. The sample format is 16-bit, 44.1kHz, mono. For a complete list of samples, see “Samples” on page 72.

Level: 0...127—Sets the volume level of oscillator 3 or 4.

Note: Volume level can be set, or affected by modulation, at several points in the signal path, so clipping distortion may occur if the levels and/or modulation amounts are set high. If clipping is undesirable, simply turn the level and/or mod amount down until it stops clipping.

Also, if LEVEL is set to 0, the oscillator is effectively off; modulation applied to the oscillator level will have no effect.

Pitch: -24...+24—Offsets the base oscillator pitch as much as two octaves up or down in semitone increments. A setting of 0 indicates there is no offset and the oscillator plays at its base pitch.

Note: A few of the sounds—for example, some of the noise types—are of a fixed pitch and do not transpose, either from the PITCH control, the pads, or via MIDI.

Fine: -50...+50—Fine tune control with a range of a quarter tone up or down. Zero is centered. Steps are in cents (50 cents = $\frac{1}{2}$ semitone). FINE settings are also reflected in the PITCH value. For example, if PITCH is set to 0, but FINE is set to -50, the displayed PITCH value is -0.50 (-50 cents).

Glide: 0...127—Sets the oscillator glide (portamento) rate. GLIDE is set independently for each oscillator. Low values are faster. See also “Glide Mode,” below.

Reverse: Reverses the playback of the sampled waveform.

Pre/Post Filter: 0...127—Oscillators 3 and 4 can be processed by Tempest’s low- and high-pass filters, completely bypass the filters, or be set to a mix of the two. A value of 0 means all of the output from oscillators 3 and 4 goes through the filters, 64 is an equal mix of filtered and unfiltered signal, and 127 bypasses the filters entirely.

Note: PRE/POST FILTER affects both oscillators 3 and 4, not just the currently selected oscillator.

Glide Mode: FixRate, FixRate A, FixTime, FixTime A—Determines how the oscillators respond when Glide is on.

- **FixRate:** The time to transition between notes varies with the interval between the notes; the greater the interval, the longer the transition time. The glide rate is fixed.
- **FixRate A:** The same as FixRate, but glide is only applied when playing legato. That is, glide only occurs when a note is held until the next note is played. This effectively allows glide to be turned on and off just by playing staccato or legato.
- **FixTime:** Glide is set to a fixed time, regardless of the interval between notes.
- **FixTime A:** The same as FixTime, but glide only occurs when playing legato.

Key Follow: Off, On—Turns keyboard tracking off or on for oscillator 3 or 4.

Lowpass

Frequency: 0...164—Sets the filter cutoff frequency over a range of more than 13 octaves. This control steps in semitones when turned slowly, but smoothly controls the filter without steps when turned at a faster rate.



4 Pole: On, Off—Selects the filter configuration. When on, the filter is in 4-pole mode. A 4-pole, low-pass filter rolls off frequencies above the cutoff frequency at a slope of -24dB/octave. When off, the filter is in 2-pole mode and has a slope of -12dB/octave and a more gradual roll-off of the higher frequencies.

Resonance: 0...127—Emphasizes a narrow band of frequencies around the cutoff frequency. In 4-pole mode, high levels of resonance can cause the filter to self oscillate. In 2-pole mode, resonance is much more subtle.

Audio Mod: 0...127—Controls the amount of audio from oscillator 1 used to modulate the filter cutoff frequency. For filter-only audio, set 1/2 Mix in the Oscillators section to 0/100, oscillator 2 Shape to Off, and oscillator 1 Shape to the desired waveshape. This is useful for bell-like FM sounds. A wide range of sounds can also be made using AUDIO MOD with the oscillators routed normally through the filter.

Key > Freq: 0...127—Sets the amount of modulation from the note number—from either the beat, the pads, or via MIDI—to the filter frequency. Sometimes called key tracking in keyboard synths, because the cutoff frequency “tracks” notes played on the keyboard. A setting of 64 will step the filter in semitone increments for each successive note, 32 is quarter tones, and so on.

Highpass

Frequency: 0...127—Sets the filter cutoff frequency for the 2-pole high-pass filter. A setting of 0 passes all frequencies. Turning the control up attenuates frequencies below the cutoff at a slope of -12dB/octave.



Key > Freq: 0...127—Sets the amount of modulation from the note number— from either the beat, the pads, or via MIDI—to the filter cutoff frequency. Sometimes called key tracking in keyboard synths, because the cutoff frequency “tracks” notes played on the keyboard.

Amp

Feedback: 0...127—The left audio output of each voice can feed back into the signal path pre-filter. Depending upon the amount of feedback, this can result in anything from a pleasing fuzzy distortion-like sound to unpredictable harmonic squealing and widespread pandemonium. A setting of 0 prevents any of the signal from feeding back. See “Tempest Voice Architecture” on page 24 for more information.



Note: Because the feedback loop is taken from the left output, pan settings and modulation will affect the behavior and level of feedback, so be careful (and maybe turn down your monitors/headphones while tweaking?)!

Volume: 0...127—Sets the volume of the current sound before it is sent to the mixer.

Note: Volume level can be set, or affected by modulation, at several points in the signal path, so clipping distortion may occur if the levels and/or modulation amounts are set high. If clipping is undesirable, simply turn the level and/or mod amount down until it stops clipping.

Envelopes

Tempest has five six-stage DAPDSR (delay/attack/peak hold/decay/sustain/release) envelope generators for each of its six voices. Two of the

envelopes are “hard wired” to specific destinations: low-pass filter and amplifier (VCA). The PITCH envelope uses All Oscillators as a default destination, but it can be changed. The two auxiliary envelopes are assignable to any modulation destination. (For a complete list, see “Modulation Destinations” on page 71.) Additionally, any of the envelopes can modulate any destination using the modulation paths. (See “Modulation Paths” on page 37.)



The envelopes can also be switched to a two-stage APD (attack/peak hold/decay) type suited to percussive sounds simply by turning AD MODE on.

Envelope Generators: Pitch, Lowpass, Amp, Aux1, Aux2—Choose one of the five envelope generators to edit.

AD Mode: Off, On—Percussive sounds typically have a fast attack and then decay to silence with no sustain. When AD MODE is on, only the attack and decay portions of the envelopes are used, hence “AD.” AD MODE affects all five envelopes.

AD Mode is effectively the same as setting SUSTAIN to 0 and RELEASE to the same value as DECAY, so the same effect can be achieved when AD MODE is off.

Delay: 0...127—Sets a delay between the time the envelope is gated on and when the attack portion actually begins.

Attack: 0...127—Sets the attack time of the selected envelope.

Peak: 0...127—Peak is short for peak hold. Normally, the decay stage of the envelope begins immediately after the attack stage reaches its ultimate value. Peak briefly holds the envelope at its peak value, delaying the transition from attack to decay. This can add extra punch to a Sound’s attack.

Decay: 0...127—Sets the decay time of the selected envelope.

Sustain: 0...127—Sets the sustain time of the selected envelope. In AD Mode, SUSTAIN has no effect.

Release: 0...127—Sets the release time of the selected envelope. In AD Mode, RELEASE has no effect.

Amount: -127...127—Sets the amount of modulation from the selected envelope to its destination. Use Amount (and not Velocity Amount) if you don't want the Sound to use the velocity sensitivity of Tempest's drum pads. The modulation amount can be positive or negative, allowing for inverted envelope control. The Amp envelope is an exception, with a range of only positive values (0-127), since VCA gain can't be negative!

Velocity Amount: 0...127—For most Sounds, the velocity with which the pads (or an external MIDI controller) are struck should be used to modulate the envelope amount. For example, VELOCITY AMOUNT (and not AMOUNT) routed to the AMP envelope will use the drum pads' velocity sensitivity to control the volume of the Sound.

AMOUNT and VELOCITY AMOUNT work in combination. If AMOUNT is set to 127, VELOCITY AMOUNT will not have any effect regardless of the setting or the velocity with which the pad is struck because the modulation amount is already maxed out.

When using VELOCITY AMOUNT to control the envelope amount of velocity-sensitive sounds, AMOUNT can be used to set the minimum peak level of the envelope when note velocity is 1 or close to it. For example, let's say you wish to create a drum sound in which the softest-played notes produce a volume $\frac{1}{4}$ that of the loudest notes, but when using VELOCITY AMOUNT alone, the softly-played notes are nearly silent. In this case, you would set the AMP envelope's VELOCITY AMOUNT to 127 and its AMOUNT to around 32. For this reason, when creating touch-sensitive sounds, you might think of the AMOUNT parameter as "Minimum Envelope Amount."


Note: Velocity is ignored when 16 LEVELS in Pad Function or FIXED LEVEL in Pad Options is on. See "16 Levels" on page 9 and "Pad Options" on page 10 for more information.

Destination: Off, mod destination 1, mod destination 2, ...—Envelopes PITCH, AUX1, and AUX2 are assignable to any of Tempest's modulation destinations. For a complete list, see "Modulation Destinations" on page 71.

A Note About Envelope Shape

Like most synthesizers, Tempest's envelopes are not linear, but curved. Without going into too much detail (or math), the curve is based on a logarithmic function. But that curve—and, therefore, the envelope's shape—can be altered with modulation.

For example, figure A below shows the “normal” decay of a simple AD envelope where attack is set to 0.

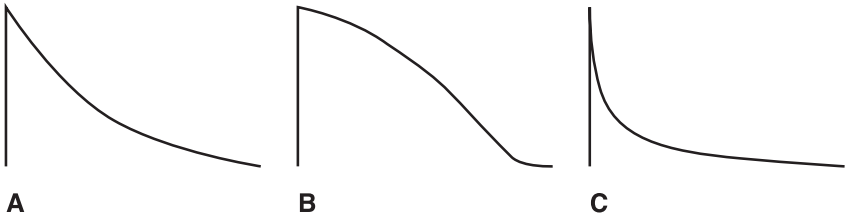

Using one of Tempest's Mod Paths (see page 37), an envelope can be used to modulate itself. Figure B shows what happens when the envelope in figure A is used as the modulation source and the mod destination is that same envelope's decay, with a mod amount of -60; figure C is with a mod amount of 60.

Note: Modulating an envelope segment also changes its length (time). In the previous examples, figure B's decay time was decreased and figure C's decay time was increased.

LFO 1 & 2

Tempest has two low frequency oscillators (LFOs). The LFOs can be free-running or synced to the beat.

LFO2: Off, On—Chooses the LFO to edit. When off, the panel controls affect LFO 1; when on, LFO 2.

Rate: 0...162—Sets the LFO frequency. Speed ranges from slow (30 seconds) to very fast—at 90 (8 Hz, C-2) and above the speed steps in semitones, up to 162 (523 Hz, C4 or an octave above middle C).

Note: Some of the analog functions may not respond as expected to the fastest LFO speeds, due to speed limitations of the control voltages, but they will certainly generate some interesting sounds.

Amount: 0...127—Sets the amount of LFO routed to the destination.

Shape: Triangle, Reverse Sawtooth, Sawtooth, Square, Random—The waveshape of the LFO. Random (or “sample and hold”) generates a random value that changes once per cycle.

Destination: Off, mod destination 1, mod destination 2, ...—Sets the modulation destination to which the LFO is routed. See “Modulation Destinations” on page 71 for a list of possible destinations.

Sync: Off, On—When on, the LFO syncs to the beat based on multiples of quarter notes, regardless of the time signature. RATE displays the values in the following table.

Display	Cycles per Quarter Note(s)
32 Qtr	One LFO cycle lasts 32 quarter notes
16 Qtr	One LFO cycle lasts 16 quarter notes
8 Qtr	One LFO cycle lasts 8 quarter notes
6 Qtr	One LFO cycle lasts 6 quarter notes
4 Qtr	One LFO cycle lasts 4 quarter notes
3 Qtr	One LFO cycle lasts 3 quarter notes
1/2 Note	One LFO cycle lasts 2 quarter notes
Qtr Dot	One LFO cycle lasts 1.5 quarter notes
1 Qtr	One LFO cycle lasts 1 quarter note
Qtr Trip	Two LFO cycles every three quarter notes
8th	Two LFO cycles per quarter note
8th Trip	Three LFO cycles per quarter note
1/16	Four LFO cycles per quarter note
16th Trip	Six LFO cycles per quarter note
32nd	Eight LFO cycles per quarter note
64th	Sixteen LFO cycles per quarter note

Tip: Use SYNC to modulate a parameter in time with a beat. For example, for a beat in 4/4, an LFO set to a triangle wave and a rate of 16 Qtr can modulate the filter frequency for a sweep that repeats every 4 bars, precisely.

Modulation Paths

Tempest has eight general-purpose modulation paths with a great variety of mod sources and destinations available. Press MOD PATH to display the settings for the current sound.

Source: Off, mod source 1, mod source 2, ...—Sets the modulation source for the selected mod path. See “Modulation Sources” on page 70 for a complete list.

Tip: Use SOURCE to route external MIDI controllers to Tempest’s mod destinations.

Amount: -127...127—Sets the amount of the source used to modulate the destination. The modulation amount can be positive or negative, allowing for inverted control.

Destination: Off, mod destination 1, mod destination+ 2, ...—Sets the modulation destination for the selected mod path. See “Modulation Destinations” on page 71 for a complete list.

Choke and Voice Assign

Each of a Beat's thirty-two Sounds can be choked by one of two other Sounds in the Beat. The most obvious use is to enable a pedaled or closed high-hat to choke off an open high-hat.

To Set Choke for a Sound:

1. In 16 SOUNDS pad mode and SOUNDS edit mode, press SHIFT then MOD PATHS, or repeatedly press the PAGE DOWN or ▼ key, to navigate to the Misc screen.
2. Tap any pad to select a Sound.
3. Use the CHOKE 1 Soft Knob to choose the Sound/pad that will be choked whenever this sound plays. If desired, use CHOKE 2 to specify a second choke Sound/pad.

VOICE ASSIGN restricts a Sound to playing on only one of Tempest's six voices. By default, Tempest uses dynamic voice allocation. That is, if a voice is already occupied with playing a Sound, new notes will play on the next available voice. When all six voices are in use, new notes will steal a voice from one of the Sounds already playing, causing that Sound to be cut off. Assigning a Sound to a specific voice guarantees that voice won't be stolen, at least not by the remaining dynamically allocated voices. Multiple Sounds can be assigned to a single voice and will still steal the voice when two or more notes play simultaneously.

Again, using a high-hat as an example, assigning the different high-hat articulations to a single voice will guarantee that the high-hat will always sound and its voice will not be stolen. If a Beat has a steady 8th- or 16th-note pattern, it will be pretty obvious if the high-hat's voice is stolen, even for one note.

Be aware, though, that some Sounds—particularly Sounds with longer decays like crash or ride cymbals—can benefit from the voices being dynamically allocated. These Sounds tend to sound better or, at least, more realistic, if they're allowed to overlap and not be cut off by voice stealing, so it may take some planning and tweaking to achieve a good balance between Sounds assigned to specific voices and Sounds that use the remaining pool of dynamically allocated voices.

VOICE ASSIGN also assigns a Sound to a specific voice output. For example, if the kick drum is assigned to voice 1, the kick drum will be available for separate processing via the Voice 1 jack on the rear panel. Inserting a plug in one of the individual voice output jacks removes that voice from the main outputs. The voice output jacks are stereo, and so retain any pan settings.

To Assign a Sound to a Specific Voice:

1. In 16 SOUNDS pad mode and SOUNDS edit mode, press SHIFT then MOD PATHS, or repeatedly press the PAGE DOWN or ▼ key, to navigate to the Misc screen.
2. Tap any pad to select a Sound.
3. Use the VOICE ASSIGN Soft Knob to choose one of the six voices.


Beat-wide Parameters

Normally the panel sound controls operate on a single sound. However, if Pad Function is set to 16 BEATS, only eight of these controls are enabled and they affect the playback of all sounds playing in the beat. These eight parameters are called Beat-wide parameters:



The eight parameters are Oscillator Pitch, Lowpass Frequency, Lowpass Resonance, Audio Mod, Highpass Frequency, VCA Feedback, Envelope Attack and Envelope Decay. For each of these eight parameters, moving the knob causes the playback of all sounds to be altered simultaneously. Because the parameter values can be very different for different sounds, the individual parameters are moved proportionally in a way that results in the overall change sounding very natural.

If the SOUNDS key (in the Screens section) is pressed, one of the following two screens is displayed:

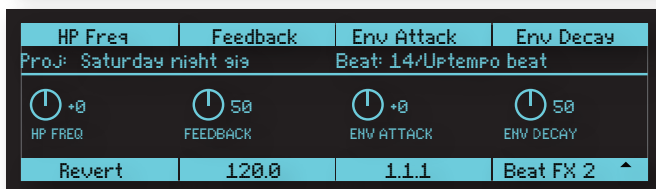

Notice the REVERT Soft Key. After any of the Beat-wide parameters is changed, this soft key appears. Pressing it reverts the beat playback to its original state before any controls were changed.

Mixer and Effects


A 32-input mixer permits unique mix (volume, mute, solo, pan, delay send, and delay on/off for each sound) and effects settings (delay time, delay feedback, distortion, compression) for each Beat.



The Delay feature acts like a digital audio delay but instead creates additional delayed notes in order to keep Tempest's entire signal in the analog domain.




You can change the mixer settings by adjusting the controls in the Mixer section of the panel, or by selecting MIXER in the Screens section (pressing PADS and SOUNDS together), which causes the Mixer screen to appear.




Use the PAGE UP and PAGE DOWN keys to switch between the four mixer screens below:


This screen adjusts VOLUME, PAN, MUTE, and SOLO for each sound pad.




This screen adjusts DELAY AMOUNT and DELAY ON/OFF for each sound pad. Note that sounds must be velocity-sensitive for the delayed notes to have volumes other than full.



This screen adjusts DELAY REPEATS and DELAY TIME for the delay send mix.




This screen shows the Beat's settings for the panel's DISTORTION and COMPRESSION controls.



Real Time FX

The Real Time FX touch sliders have two modes:

- **Beat FX:** The sliders can alter the sound of the entire Beat playback.
- **Note FX:** The sliders can alter parameters of a single Sound, and those changes can be recorded into the Beat.

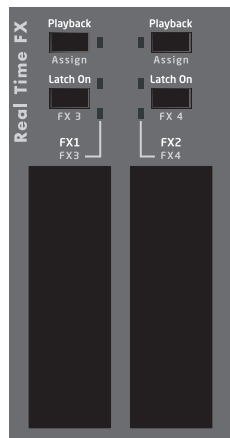

Beat FX

If Pad Function is set to 16 BEATS, Beat FX mode is active, in which slider movements affect Beat-wide sound parameters, altering the sound of the entire Beat's playback. In this mode, the PLAYBACK key is always on.

Try it out. Select the 16 BEATS key, press a beat pad and press PLAY. Now press either of the sliders and move your finger up and down. Hear how your finger movements alter the sound of the Beat. Now hold SHIFT and press the left LATCH ON key, then move your finger on the left slider as the Beat plays. Notice that you hear a different sound change, because you've just selected the alternate FX3 function for the left slider.

Here's what the keys do:

Playback key
The Playback key is always on.

Shift + Playback: Assign
This displays the Beat FX Assign screen, permitting the viewing or editing of the Beat FX assignments.

The Latch On key
Normally the sliders are active only when you touch them. If the Latch On key is on, the sliders remain active at their last touched positions at all times.

Shift + Latch On: FX1/FX3 or FX2/FX4 Select
Pressing Shift + the left Latch On key toggles the left slider between its FX1 and FX3 functions. Pressing Shift + the right Latch On key toggles the right slider between its FX2 and FX4 functions.

To view or edit the Beat FX assignments, press **SHIFT** + either **PLAYBACK** key:

Soft Knob 1: Select Row
Select one of 8 Beat FX modulation paths for editing.

Soft Knob 3: Amount
This control varies the amount of modulation from -127 to 127.

Edit Beat FX1	Source	Amount	Destination
Proj: Saturday night ssa		Beat: 14/Utempo beat	
Beat FX1: Slider1 Pos +/-	15	BW All Osc Freq	
Beat FX2: Slider2 Pos +/-	42	BW Lowpass Freq	
Beat FX3: Slider3 Pos +/-	0	BW All Env Dec	
Beat FX4: Slider4 Pos +/-	24	BW Highpass Freq	
	120.0	1. 1. 1	Beat FX

Soft Knob 2: Source
This selects the mod source.
The options are:
"Position +/-" (bipolar with 0 at center,
"Position+" (bipolar with 0 at bottom,
and "Pressure" each for FX Sliders 1-4.

Soft Knob 4: Destination
Options are all Beat-wide sound parameters: All Osc Freq, Feedback, Lowpass Cutoff, Resonance, Audio Mod, Highpass Cutoff, All Env Attack, All Env Decay and Beat Roll On/Off

Beat FX slider movements are for live performance only and cannot be recorded. However, Note FX (described in the following section) does permit recording of slider movements, and Note FX sliders may be assigned to Beat-wide sound parameters.

Note FX

If Pad Function is not set to 16 BEATS, Note FX mode is active, in which slider movements affect the sound of a single sound pad, altering one of its sound parameters. Unlike Beat FX, these movements can be recorded into the Beat.

Try it out. Select the 16 SOUNDS key, then press a sound pad repeatedly while moving your finger on one of the sliders. Notice that the sound changes as you move the slider. (If nothing happens, try another sound pad because the one you selected may have no Note FX assignment.) Now hold **SHIFT** and press the left **LATCH ON** key, then move your finger on the left slider as the Beat plays. Notice that you hear a different sound change, because you've just selected the alternate FX3 function for the left slider. If you move the sliders while recording a sound pad into a Beat, the value of the slider at the moment the pad is played will be recorded into the new note, and these parameter changes will be heard when the Beat plays back.


Here's what the panel keys do:

Playback key

If on, slider movements also affect any notes of the selected sound pad that play back from the beat. If on while recording, these slider movements are recorded back into the played notes.

Shift + Playback: Assign

This displays the Note FX Assign screen, described below.



The Latch On key

Normally the sliders are active only when you touch them. If the Latch On key is on, the sliders remain active at their last touched positions at all times.

Shift + Latch On: FX1/FX3 or FX2/FX4 Select

Pressing Shift + the left Latch On key toggles the left slider between its FX1 and FX3 functions. Pressing Shift + the right Latch On key toggles the right slider between its FX2 and FX4 functions.

To view or edit the Note FX assignments, select Note FX Assign by holding SHIFT while pressing either PLAYBACK key:

Soft Knob 1: Select Row

Select one of the 4 Note FX channels (within each note event) for editing.

Soft Knob 3: Amount

Select the amount of effect the slider movement has on the destination parameter.

Beat & Sound

Each of the beat's 32 sounds has a unique set of 4 Note FX assignments. Those displayed apply only to the selected sound.

Select Row	Source	Amount	Destination
Bt: 14/Swins beat 100 bpm	Snd: A12/Boomy Kick		
Note FX1: Slider1 Pos +/-	+4	Osc Pitch	
Note FX2: Slider2 Pos +/-	+25	LP Freq	
Note FX3: Slider3 Pos +/-	+43	LP Reson	
Note FX4: Slider4 Pos +/-	+51	Env Decay	
	1700	1.1.1	Note FX

Soft Knob 2: Source


This selects the input for the selected Note FX channel (1-4) within each note. Options are Slider FX1-4 Position (either positive or bipolar) or Slider FX1-4 Pressure.

Soft Knob 4: Destination

This selects the destination for the Note FX channel within each note. A variety of voice modulation destinations are available.

Rec/Edit Keys

These four keys provide a variety of functions for editing Sounds, Beats, Play Lists, and Projects.



The Click key

Pressing this toggles the click (metronome) on or off. The click volume can be changed in the System: General menu.

Note: Although Click does use one of the voices, after you have a couple of sounds recorded you shouldn't need it and it can be turned off.

The Undo Rec key


If the UNDO REC light is on, this means there is something to undo. Pressing UNDO REC will undo all recording changes made during the last recording pass (since the moment you started the Beat playing with REC on) and will turn off the light. Pressing it a second time will REDO whatever was removed by pressing UNDO REC. This is a single-level undo.

Holding SHIFT while pressing UNDO REC invokes the UNDO SOUND command. This will restore the selected sound to its last loaded or saved status, undoing any edits since then. This is a single-level undo.

The Erase key

All notes in a Beat can be erased easily in either 16 SOUNDS or 16 BEATS mode.

In either 16 SOUNDS or 16 BEATS, press and hold ERASE, and then press the ERASE ALL NOTES soft key. All notes in the current Beat are erased.

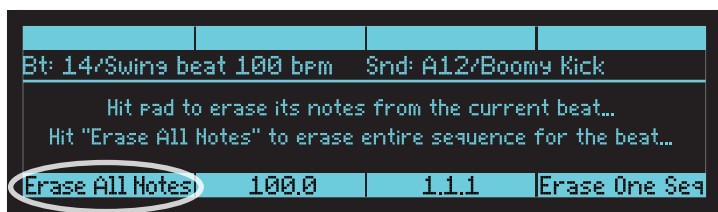

To quickly Erase All Notes of a single Sound Pad from a Beat:

1. Press 16 SOUNDS.
2. While holding ERASE, press the sound pad to be erased.

To Erase All Notes of a single Sound Pad from Sound Bank B:

1. To erase a Sound in Sound Bank B from a Beat, select SOUND BANK B before or after holding ERASE.
2. Hit a pad to erase that sound.

To quickly Erase Only Some Notes from a Beat:

1. Press 16 SOUNDS.
2. Turn RECORD on and press PLAY.
3. Hold both SHIFT and ERASE, then during the time that the notes to be erased are playing, also hold the sound pad for those notes.

The Copy key

To quickly Copy One Beat over another Beat Pad, replacing its contents:

1. Press 16 BEATS.
2. While holding COPY, press the Beat pad to be copied from, then the Beat pad to be copied to.

To quickly Copy one Sound to another Sound Pad, replacing its contents:

1. Press 16 SOUNDS.
2. While holding COPY, press the Sound pad to be copied from, then the Sound pad to be copied to.

To Copy one Sound to another Sound Bank:

1. Press 16 Sounds.
2. While holding COPY, press the Sound pad to be copied from.
3. While still holding COPY, press SOUND BANK B to switch between banks.
4. While still holding COPY, press the Sound pad to be copied to.

The Edit Function

Holding Erase and Copy together presents a menu of functions for editing sounds, beats or projects held in RAM memory (not in flash memory)

Copy Sound	Initialize Sound	Rename Sound
Copy Beat	Initialize Beat	Rename Beat
Copy Bars	Insert Bars	Delete Bars
Rename Project	Initialize Project	

Turn Soft Knob 1 to select one of the edit functions, then press the Soft Key to select it. Each screen contains up to four fields that are edited using the 4 soft knobs. Once the fields are set correctly, pressing the Soft Key performs the editing function.

1. Copy Sound

This copies a Sound (in any Beat) over another Sound within the same or a different Beat. Enter the Source Beat and Sound, the Destination Beat and Sound, then press the Copy Now soft key.

Note that while Pad Function is set to anything other than 16 Beats, the Copy key can also be used to copy one Sound pad over another.

2. Initialize Sound

This initializes any Sound (in any Beat) to default settings. Enter the Source Beat and Sound to initialize, then press the Init Now soft key.

3. Rename Sound

This permits you to rename a Sound (in any Beat). Select the Beat and Sound to rename, use the Select Char and Edit Char soft knobs to enter the new name, and press the “Rename Now” soft key.

Note that while this screen is active, the Page Up key becomes Insert Char, inserting a new character into the name, and the Cursor Up key becomes Delete Char, deleting a character from the name.

4. Copy Beat

This copies any Beat over any other Beat. Enter the Source and Destination Beats, then press Copy Now.

Note that if Pad Function is set to 16 Beats, the Copy key can be used to do the same thing.

5. Initialize Beat

This initializes any Beat to default settings at the specified time signature, erasing any previous contents. Enter the Beat to initialize, the Time Signature and Number of Bars, then press the Init Now soft key.

6. Rename Beat

This permits you to rename both the long and short names of any beat. Enter the Beat to rename, use the Select Char and Edit Char soft knobs to edit the Name and/or Short Name (the name that appears in the 2x8 matrix of 16 Beats screen), then press the Rename Now soft key.

Note that while this screen is active, the Page Up key becomes Insert Char, inserting a new character into the name, and the Cursor Up key becomes Delete Char, deleting a character from the name.

7. Copy Bars

This copies a range of bars from one Beat to the same or a different Beat, either inserting into or replacing the destination Beat's bars. There are two screen pages.

On the first screen, enter the Source Beat and First and Last Bars to copy, then press the Next soft key.

On the second screen, enter the Destination Beat and set the Copy Mode to either Replaces, Insert Before or Insert After. The middle parameter is used to specify either the First Bar to Replace, the Bar to Insert Before or the Bar to Insert After. To perform the copy, press the Copy Now soft key.

8. Insert Bars Into Beat

This inserts blank bars into a Beat, using the Beat's time signature. Enter the Beat, the Blank Bars to Insert and the Bar to Insert Before, then press the insert Now soft key.

9. Delete Bars from Beat

This deletes bars from a Beat. Enter the Beat, the First and Last Bar to delete, then press the Delete Now soft key.

10. Change Time Signature of Beat

This function allows you to change the time signature of all measures within a beat. If the new time signature is shorter, the notes at the end of each bar will be truncated. Or if the new time signature is longer, the notes at the beginning of each bar will be copied to the end of the bar to fill the new space. You can also change the number of bars in the beat. If the new number of bars is greater, the notes in the earlier bars are copied to the new bar(s) at the end. Or if the new number of bars is lesser, the ending bars are deleted entirely.

To change time signature, enter the beat, new time signature and number of bars, then press the Set Sig Now soft key.

11. Rename Project

This renames the currently loaded project. Use the Select Char and Edit Char soft knobs to edit the name, then press the Rename Now soft key. Note that while this screen is active, the Page Up key becomes Insert Char, inserting a new character into the name, and the Cursor Up key becomes Delete Char, deleting a character from the name.

12. Initialize Project

This initializes the entire Project in RAM memory, erasing all 16 Beats and all of their Sounds, and resetting them to default settings! To perform the initialize, press the Init Now soft key.

13. Rename Playlist

This utility allows you to Name or Rename one of the four Playlists. Select the Playlist number to rename, use the Select Char and Edit Char soft knobs to edit the Name, then press the Rename Now soft key.

14. Copy Playlist

This utility copies one of the four Playlists to another, in order to rearrange the order or to edit an existing Playlist.

15. Initialize Playlist

This utility initializes the selected Playlist to the default (blank) settings, allowing you to create a new Playlist.

Turn All Notes Off

Tempest is capable of being played from the internal sequencer, the pads, and MIDI simultaneously. If a stuck note should occur, simply press **LEFT SHIFT + RIGHT SHIFT + STOP** to force all the voices off.

Save/Load

Pressing **SAVE/LOAD** presents a menu of functions related to saving or loading files. Like a personal computer, Tempest has both random access memory (RAM) and permanent non-volatile storage for saved Sounds, Beats, and Projects. The current Sound, Beat, or Project is always loaded into RAM for playback and editing. Tempest uses flash memory for non-volatile storage.

It is important to understand the distinction between RAM and flash. As with most PC-based software applications, edits to files in RAM must be saved to flash to be recalled later. But, like most synthesizers, Tempest will not prompt you to save changes when powering down or loading another file. It would be pretty annoying if in the middle of a frenetic, knob-twisting, performance, a prompt came up asking you to save changes every time you switched Beats or loaded a file! But, while you are making beats and sounds, it's good to get in the habit of saving your work often and, occasionally, backing your work up via MIDI.

Note: Beats include all Sounds used in them and Projects include Beats, which, in turn, include all Sounds in each of the Beats. See “Sounds, Beats, and Projects” on page 3 for a general explanation of the relationship between Sounds, Beats, and Projects.

Saving Sounds, Beats, and Projects

Sounds are saved to one of several folders in Tempest's flash memory. They can also be exported and saved as system exclusive MIDI data.

To Save a Sound to Flash:

1. In 16 SOUNDS mode, tap a pad to choose the Sound to save.
2. Press **SAVE/LOAD**, choose Save Sound, and press the **NEXT** Soft Key.
3. The current source Beat and Sound are displayed and can be changed, if desired. Press the **NEXT** Soft Key.
4. Select the destination Sound folder.
5. Enter the name using the **EDIT FILENAME** Soft Knob to choose characters and the **LEFT** and **RIGHT** cursor keys to move the cursor.
 - Press the **INSERT CHAR** Soft Key to insert a blank space before the cursor. Press the **DELETE CHAR** Soft Key to delete the character highlighted by the cursor.

6. Press the **SAVE NOW** Soft Key.

Sounds are saved to one of several folders in Tempest's flash memory. They can also be exported and saved as system exclusive MIDI data. See page 56.

To Save a Beat to Flash:

1. In 16 BEATS mode, tap a pad to choose the Beat to save.
2. Press **SAVE/LOAD**, choose Save Beat, and press the Next Soft Key.
3. The current source Beat is displayed and can be changed, if desired. Press the Next Soft Key.
4. Select the destination Beat folder.
5. Enter the name using the **EDIT FILENAME** Soft Knob to choose characters and the **LEFT** and **RIGHT** cursor keys to move the cursor.
 - Press the **INSERT CHAR** Soft Key to insert a blank space before the cursor. Press the **DELETE CHAR** Soft Key to delete the character highlighted by the cursor.
6. Press the **SAVE NOW** Soft Key.

Beats are saved to one of 10 Beats folders in Tempest's flash memory. They can also be exported and saved as system exclusive MIDI data. See page 57.

To Save a Project to Flash:

1. Press **SAVE/LOAD**, choose Save Project, and press the **NEXT** Soft Key.
 2. Select the destination Projects folder.
 3. Enter the Project name using the **EDIT FILENAME** Soft Knob to choose characters and the **LEFT** and **RIGHT** cursor keys to move the cursor. Press the **NEXT** Soft Key.
 - Press the **INSERT CHAR** Soft Key to insert a blank space before the cursor. Press the **DELETE CHAR** Soft Key to delete the highlighted character.
- Note:** If the Project file name already exists, you will be warned that you are about to overwrite the existing Project file.
4. Press the **SAVE NOW** Soft Key.

Projects are saved to one of 10 Project folders in Tempest's flash memory. They can also be exported and saved as system exclusive MIDI data. See page 57.

Loading Sounds, Beats, and Projects

A Sound is loaded into RAM from flash and assigned to one of Tempest's pads. Sounds can also be imported via MIDI. (See "Importing Sounds, Beats, and Projects" on page 59.)

To Load a Sound:

1. In 16 SOUNDS mode, tap a pad to choose the destination Sound.
2. Press SAVE/LOAD, choose Load File (Sound/Beat/Project), and press the NEXT Soft Key.
3. Choose the Type, Folder, and File, and press the NEXT Soft Key.
4. The selected destination Beat and Sound are displayed, but can be changed, if desired.
5. Press the LOAD NOW Soft Key.
6. Press the AGAIN Soft Key to load another file or SAVE/LOAD to exit.

The Sound is loaded into the destination pad. Any unsaved edits to the previous Sound will be lost. Press SAVE/LOAD again at any time prior to pressing LOAD NOW to cancel the operation.

A Beat is loaded into RAM from flash and assigned to one of Tempest's pads. Beats can also be imported via MIDI. (See "Importing Sounds, Beats, and Projects" on page 59.)

Load Beat Options *(including Loading Sound Kits)*

When loading a Beat, there are five options to determine what data gets loaded.



Normal—All Beat data will be loaded into the destination Beat.

Sounds + Mixer—Only the Sounds and mixer settings will be loaded.

Sounds Only—Only the Sounds will be loaded.

Note: In Tempest there are no separate “Sound Kit” or “Drum Kit” files. Instead, you can use this option to load only the sounds from any Beat file. This has the advantage that any Beat file can be used as a sound kit file.

Sequencer + Note FX—Only sequence and Note FX settings will be loaded.

Beat FX—Only the Beat FX settings will be loaded.

To Load a Beat:

1. In 16 BEATS mode, tap a pad to select the destination Beat.
2. Press SAVE/LOAD, choose Load File (Sound/Beat/Project), and press the NEXT Soft Key.
3. Choose the Type, Folder, and File, and press the NEXT Soft Key.
4. Choose the Beat Load Option: Normal, Sounds + Mixer, Sounds Only, Sequencer + Note FX, or Beat FX.
5. The selected destination Beat is displayed, but can be changed, if desired.
6. Press the LOAD NOW Soft Key.
7. Press the AGAIN Soft Key to load another file or SAVE/LOAD to exit.

The Beat is loaded into the destination pad. Any unsaved edits to the previous Beat will be lost. Press SAVE/LOAD again at any time prior to pressing LOAD NOW to cancel the operation.

A Project is loaded from flash and replaces the current Project in RAM. (Only one Project can be loaded at a time.) The last Project saved is loaded by default on power up. Projects can also be imported via MIDI. (See “Importing Sounds, Beats, and Projects” on page 59.)

To Load a Project:

1. Press SAVE/LOAD, choose Load File (Sound/Beat/Project), and press the NEXT Soft Key.
2. Choose the Folder and File, and press the NEXT Soft Key.
3. Press the LOAD NOW Soft Key to load the Project.
4. Press the AGAIN Soft Key to load another file or SAVE/LOAD to exit.


Loading a Project replaces all the Sounds and Beats in RAM with the Sounds and Beats in the Project. Press SAVE/LOAD again at any time prior to pressing LOAD NOW to cancel the operation.

Saving and Loading Sound Kits

Tempest doesn't actually use sound kit files. Instead, you can choose to load only the sounds from any beat file into the beat you're working on, so any beat becomes the equivalent of a "sound kit" file.

Loading sounds quickly from the Pads screen

Sounds can also be loaded directly from the Pads screen in 16 SOUNDS mode. The LOAD SOUND parameter enables Sounds for the selected pad to be auditioned and changed.

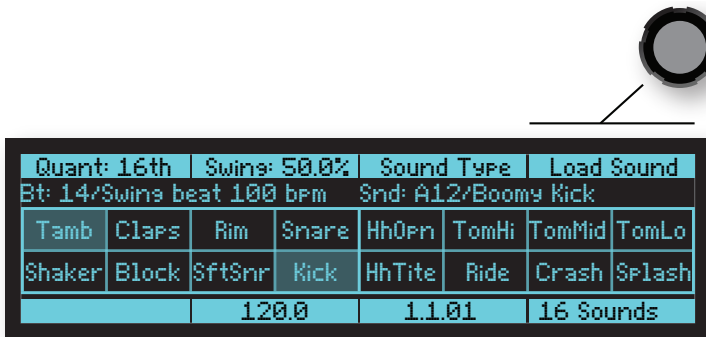

In Pads view, strike a pad to select a Sound and then turn the LOAD SOUND soft knob clockwise to load the first available Sound for the current Sound directory. Continue scrolling through the list to audition different Sounds or use the SOUND DIRECTORY soft knob to change to a different directory of Sounds. Press the REVERT soft key to revert to the saved Sound.

Note: REVERT is available until another pad is struck in 16 SOUNDS mode. Pads can be struck in any other Pad Function mode, but once another Sound pad is struck, REVERT is unavailable. To return to the saved settings, reload the file. REVERT SOUND always resets the sound to the last loaded or saved setting of it's Beat.

Exporting Sounds, Beats, and Projects

Sounds, Beats, and Projects can be exported over MIDI to a computer application or hardware device capable of recording SysEx data. Most modern MIDI sequencers are capable of recording SysEx and there are standalone applications like SysEx Librarian for Mac OS and MIDI-OX for Windows that make it very easy to record, name, and store SysEx files. SysEx data can also be dumped directly from one Tempest to another using a single MIDI cable.

Exporting directly from RAM or from saved files in flash memory yields slightly different results. Sounds, Beats, and Projects exported from RAM contain no information about their source or destination. If Sounds/Beats/Projects exported from RAM are later imported, they are loaded into RAM and must be saved to flash or they will be lost when power is cycled. Sounds/Beats/Projects exported from saved files will import into flash in the same folder location from which they were exported and do not need to be saved. But, they do need to be loaded into RAM if you want to play them.

To Export a Sound from RAM over MIDI:

1. Connect Tempest to the receiving device (computer running MIDI application, dedicated hardware sequencer, etc.) using either USB or a MIDI interface. If using a MIDI interface, connecting Tempest's MIDI out to the device's MIDI in is sufficient for exporting.
2. In 16 SOUNDS mode, tap a pad to choose the Sound to export.
3. Press SAVE/LOAD, choose Export Sound in RAM over MIDI, and press the NEXT Soft Key.
4. The current source Beat and Sound are displayed and can be changed, if desired.
5. Choose the destination (MIDI and/or USB).
6. Enable the receiving device to receive and record SysEx.
7. Press the EXPORT NOW Soft Key.
8. The device records the SysEx data, which can then be named and saved for backup and importing into Tempest.
9. Press the AGAIN Soft Key to export another file or SAVE/LOAD to exit.

To Export a Beat from RAM over MIDI:

1. Connect Tempest to the receiving device (computer running MIDI application, dedicated hardware sequencer, etc.) using either USB or a MIDI interface. If using a MIDI interface, connecting Tempest's MIDI out to the device's MIDI in is sufficient for exporting.
2. In 16 BEATS mode, tap a pad to choose the Beat to export.
3. Press SAVE/LOAD, choose Export Beat in RAM over MIDI, and press the NEXT Soft Key.
4. The current source Beat is displayed and can be changed, if desired.
5. Choose the destination (MIDI and/or USB).
6. Enable the receiving device to receive and record SysEx.
7. Press the EXPORT NOW Soft Key.
8. The device records the SysEx data, which can then be named and saved for backup and importing into Tempest.
9. Press the AGAIN Soft Key to export another file or SAVE/LOAD to exit.

To Export a Project from RAM over MIDI:

1. Connect Tempest to the receiving device (computer running MIDI application, dedicated hardware sequencer, etc.) using either USB or a MIDI interface. If using a MIDI interface, connecting Tempest's MIDI out to the device's MIDI in is sufficient for exporting.
2. In 16 BEATS mode, press SAVE/LOAD, choose Export Project in RAM over MIDI, and press the NEXT Soft Key.
3. Since there can only be one Project in RAM at a time, there is no source to choose. Choose the destination (MIDI and/or USB).
4. Enable the receiving device to receive and record SysEx.
5. Press the EXPORT NOW Soft Key.
6. The device records the SysEx data, which can then be named and saved for backup and importing into Tempest.
7. Press the AGAIN Soft Key to export another file or SAVE/LOAD to exit.

To Export a Sound/Beat/Project from Flash over MIDI:

1. Connect Tempest to the receiving device (computer running MIDI application, dedicated hardware sequencer, etc.) using either USB or a MIDI interface. If using a MIDI interface, connecting Tempest's MIDI out to the device's MIDI in is sufficient for exporting.
2. Press **SAVE/LOAD**, choose **Export saved file over MIDI (Sound/Beat/Project)**, and press the **NEXT** Soft Key.
3. Choose the **Type**, **Folder**, and **File** to export.
4. Choose the destination (**MIDI** and/or **USB**).
5. Enable the receiving device to receive and record **SysEx**.
6. Press the **EXPORT NOW** Soft Key.
7. The device records the **SysEx** data, which can then be named and saved for backup and importing into Tempest.
8. Press the **AGAIN** Soft Key to export another file or **SAVE/LOAD** to exit.

To Export from one Tempest (master) to Another (slave) over MIDI:

1. Connect **MIDI out** on the master to **MIDI in** on the slave. (Tempest is incapable of acting as a **USB** host, so transfers must be done using a **MIDI** cable.)
 - If exporting a **Sound** from **RAM**, put both Tempests into **16 SOUNDS** mode, tap a pad on the master to select the source **Sound**, and tap a pad on the slave to choose the destination.
 - If exporting a **Beat** from **RAM**, put both Tempests into **16 BEATS** mode, tap a pad on the master to select the source **Beat**, and tap a pad on the slave to choose the destination.
 - If exporting a **Project** from **RAM**, put both Tempests into **16 BEATS** mode. Since there is only one **Project** in **RAM** at a time, there is no source or destination to select.
2. On the master, press **SAVE/LOAD** and choose **Export Sound/Beat/Project in RAM over MIDI** or **Export Saved File over MIDI (Sound/Beat/Project)** to transfer the data. The slave does not need to be enabled to receive the transfer. Just press **EXPORT NOW** when ready. Exports from **RAM** load into the slave's **RAM**; exports from **flash** load into the slave's **flash**.
3. Press the **AGAIN** Soft Key to export another file or **SAVE/LOAD** to exit.

Importing Sounds, Beats, and Projects

Importing data from SysEx files is simple. Connect the transmitting device to Tempest via USB or MIDI—one MIDI cable from the device's MIDI out to Tempest's MIDI in—and then open and play the files from a MIDI sequencer or SysEx utility. Files exported from RAM load into the current Sound/Beat/Project in RAM; files exported from flash load into flash in the same location from which they were originally exported. The display will give you the status of the process and let you know when the file has successfully been saved.

- Keep in mind that importing data exported from RAM replaces the current Sound, Beat, or Project in RAM. If edits to the current Sound/Beat/Project have not been saved to flash or exported, they will be lost.
- Files imported into RAM need to be saved to flash or they will be lost when the power is cycled.
- Files imported into flash need to be loaded into RAM in order to play or edit them.

Important: Import Notes

Importing a Sound/Beat/Project to flash with the same name as one already in flash will overwrite the file, so always back up your work before importing a file if you are not absolutely certain of the imported file's contents.

Due to the time it takes for Tempest to save a Sound/Beat/Project to flash, you must have a minimum one-second pause between SysEx files transmitted to the unit. Otherwise you will get errors from the flash system. SysEx Librarian and MIDI-OX can both be configured to add a pause or delay when sending multiple SysEx files.

SysEx files for Projects can be large and take twenty seconds or more to load. Press the CANCEL Soft Key if you wish to stop a SysEx import.

Renaming Files

Any of the files saved to Tempest can be renamed.

To Rename a File:

1. Press **SAVE/LOAD**, choose **MOVE/RENAME FILE** (Sound/Beat/Project) and press the **NEXT** Soft Key.
2. Choose the Type, Folder, and File to rename and press **NEXT**.
3. Use **SELECT CHAR** (Soft Knob 3) and **EDIT CHAR** (Soft Knob 4) to select and edit characters, respectively. Use **INSERT CHAR** (**PAGE UP** key) to insert space before the selected character. Use **DELETE CHAR** (**▲** key) to delete the selected character.
4. When the name is complete, press **RENAME NOW**.
5. Press **AGAIN** to rename another file or **SAVE/LOAD** to exit.

Deleting Files

Any of the files saved to Tempest can be deleted.

To Delete a File:

1. Press **SAVE/LOAD**, choose **Delete File** (Sound/Beat/Project) and press the **NEXT** Soft Key.
2. Choose the Type, Folder, and File to delete and press **NEXT**.
3. Press **DELETE NOW** to delete the file
4. Press **AGAIN** to delete another file or **SAVE/LOAD** to exit.

Note: Deleted files cannot be recovered. To cancel a delete operation, press **SAVE/LOAD** again prior to step 3.

System Settings

Select Line	Offset	Category
System: General		
1. Master Transpose	+0	
2. Fine Tune	+0	
3. Click Level	120	
4. One bar count in	Off	
		System

Press SYSTEM to view the System menu. The System menu contains various global parameters that apply to all operation regardless of the selected Beat or Sound. Any changes to these settings are remembered even after power is turned off.

The system parameters are grouped into 9 different categories. Use soft knob 4 to select the Category, soft knob 1 to select the Line within the category, and adjust the Parameter Value using soft knob 3.

System Categories

- General
- Foot Pedals
- MIDI Remote Pad Play
- MIDI Polyphonic Keyboard Play
- MIDI Clock
- MIDI System Exclusive
- BPM/Swing/Comp/Dist Sources
- UI Preferences
- System Actions

System: General

1. **Master Transpose:** -12...+12—Transposes the pitch of all voices in half-step increments, as much as one octave up (+12) or down (-12).

2. **Fine Tune:** -50...+50—Transposes the pitch of all voices in one cent increments, as much as a quarter-tone up (+50) or down (-50).

3. Click Level: 1...127—Sets the volume of the metronome click.

4. One bar count in: Off, On, Record Only—When On, one bar of metronome clicks plays before recording or playback begins. If set to Record Only, the count in only plays before recording. If Off, no count in plays.

Note: Count in does not play when syncing to an external MIDI clock.

5. Fixed Level Velocity: 2...128—Sets the velocity value used when Fixed Level in Pad Options is on.

6. Pad Velocity Curve: 1...4—Sets the overall velocity response curve for Tempest's pads. The velocity curves allow you to tailor the response of the pad to your personal playing style. The default value is 2.

7. Local Control: Off, On—Local Control performs a similar function to MIDI Local Mode on keyboard synthesizers—it internally disconnects the drum pads from the sound generator. This is useful, for example, if you are using Tempest with an external MIDI sequencer and wish to avoid sounds playing twice for each pad hit, due to notes being sent and rerouted back over MIDI to Tempest. When Off, the pads transmit note and velocity messages via MIDI as normal, but will not cause Tempest's internal sounds to play. By default, this is set to On.

System: Foot Pedals

1 & 3. Pedal 1/2 Mode: Controller, Switch: Norm Closed, Switch: Norm Open

2 & 4. Pedal 1/2 Assignment: See table—Tempest's two Pedal/Switch inputs can be configured to work with either momentary footswitches or expression pedals to control various functions.

Use Pedal Mode to choose the input device: Controller for an expression pedal, Switch, Norm Open for a normally open footswitch, and Switch, Norm Closed for a normally closed footswitch.

Mod Source Pedal 1 or 2 routes an expression pedal directly to the Foot Pedal 1 or 2 modulation source. (See "Modulation Paths" on page 37 for more information.) Master Volume routes an expression pedal directly to master volume.

The following table lists the Pedal Assignment options and the input devices with which they are typically used.

Controller	Footswitch
Mod Source Pedal 1/2	Sequencer Start/Stop
Master Volume	Sequencer Start

System: MIDI Remote Pad Play

1. Remote Pad IN Channel: All, 1...16—Sets the incoming MIDI channel for MIDI note-to-pad playback and recording. The note-to-pad mapping is programmed using the MIDI Note : Pad mapping described below.

2. Remote Pad OUT Channel: Off, 1...16—Sets the channel on which Tempest’s pads transmit MIDI note and velocity data. The pads transmit MIDI data in 16 Sounds, 16 Tunings, and 16 Levels modes. When 16 Sounds is selected, pressing a sound pad sends the MIDI note number assigned to the Pad in “4-35 MIDI Note: Pad A1-B16” described on the following page. When set to Off, note and velocity messages are not transmitted (but clock and start/stop/continue messages are).

Note: When ‘16 Tunings’ is selected, the same MIDI note number is sent for all 16 pads, using the note number assigned to the sound pad playing from all the pads. However, it is possible to send MIDI note numbers in the selected tuning as played from the 16 pads in ‘16 Tunings’ mode. To do this, go to the “MIDI Polyphonic Keyboard Play” screen and set “MIDI: Synth Sound” to the same sound pad as used in “16 Tunings,” then set the “MIDI:Synth IN Channel” to a channel other than the one selected above.

3. Pad to Note Mode: Follow Pad Func, Sounds, Beats, Mutes—Incoming MIDI Note messages can be used for playing the pads, triggering sounds, selecting beats, or muting sounds. The 4 options are:

- **Follow Pad Func:** Incoming MIDI notes will control whatever is selected by the Pad Function buttons, exactly like the pads.
- **Sounds:** Incoming MIDI Notes will always trigger sounds.
- **Beats:** Incoming MIDI Notes will always select one of the 16 beats.
- **Mutes:** Incoming MIDI Notes will always be used to mute/unmute the 32 sounds [16 each in banks A and B].

4-35. MIDI Note: Pad A1-B16: Any MIDI key—When remotely triggering sounds from received MIDI Note messages, you can assign which note number triggers each pad. Assign each of the 16 pads in banks A and B to a MIDI note number of your choice.

A MIDI note can only be assigned to a single pad. If you try to assign a MIDI note that has already been assigned, the display will read, (Used:Pad ??) and show the pad where the MIDI note has been assigned.

The following table shows the General MIDI standard drum mapping.

Note	MIDI Note	GM Inst
A4	69	Cabasa
F#3	54	Tamborine
E2	40	Electric Snare
D2	38	Acoustic Snare
A#3	46	Open Hi Hat
D3	50	High Tom
B2	47	Low Mid Tom
G2	43	High Floor Tom
F5	77	Low Wood Block
D#2	39	Hand Clap
C#2	37	Side Stick
C2	36	Bass Drum
F#2	42	Closed Hi Hat
D#3	51	Ride Cymbal 1
C#3	49	Crash Cymbal 1
G3	55	Splash Cymbal

System: MIDI Polyphonic Keyboard Play

Tempest can double as a 6-voice polyphonic analog keyboard synthesizer, playing the selected sound polyphonically and responding to your MIDI keyboard's sustain pedal and pitch bend wheel.

1. MIDI: Synth IN Channel: Off, 1...16—Sets the channel on which one of Tempest's Sounds can be played from an external MIDI keyboard or other MIDI controller, or a MIDI sequencer. When used strictly as a MIDI sound module, Tempest behaves as a six-voice analog poly synth. It responds to note messages and the "standard" controllers (pitch bend, mod wheel, aftertouch, channel pressure, etc.), provided that the Sound has those modulation sources routed to some destination.

When used to record notes to Tempest's sequencer, the external keyboard or controller controls the note's pitch, but otherwise acts much the same as recording from a pad: only one note can be recorded at a time. Velocity and duration are also recorded. Timing is subject to the current Quantize setting. Because the sequencer is event-based, continuous controllers such as pitch bend, mod wheel, and aftertouch are ignored.

IMPORTANT! The MIDI: Synth IN Channel must be set to a different channel than Remote Pad: IN Channel in order to function properly. If they are set the same, the note-to-pad mapping detailed under "Remote Pad: IN Channel" overrides the MIDI: Synth functionality.

Note: Notes played via MIDI are prioritized higher than notes played by Tempest's sequencer, so the sequencer should not steal voices while notes are playing via MIDI. Notes played by the pads have the same priority as MIDI notes, so they can steal voices from MIDI notes and vice versa.

2. MIDI: Synth Sound: A1...A16—Used to choose the pad—and its assigned Sound—that plays on the MIDI: Synth IN Channel. Because this is currently a system-level setting, MIDI data will be routed to the chosen pad, regardless of the loaded Beat or Project.

3. MIDI: Synth Root Note: C0...C10—Sets the note at which the external MIDI controller plays the Sound at the same pitch as playing it from the pad in 16 Sounds mode. For example, let's say the pad plays the sound as an A. In order to play the Sound from a MIDI keyboard without transposing, MIDI: Synth Root Note should also be set to an A, perhaps A4 or A5 to play in close proximity to middle C on the keyboard.

System: MIDI Clock

1. MIDI: Clock Mode: Off, Master, Slave, Slave Thru—In Master mode, Tempest transmits MIDI clock and start, stop, and continue messages.

In Slave mode, Tempest syncs to incoming MIDI clock and responds to start, stop, and continue messages. When slaved to an external MIDI clock, Tempest's Tempo display is preceded by "EXT." The master BPM (beats per minute) is not transmitted via MIDI as a numerical value, so Tempest must calculate the BPM from the incoming clock, and the value displayed by Tempest is subject to rounding and the accuracy of the master clock. In other words, Tempest's displayed BPM value may be slightly different from the master's, even though they're perfectly synced.

In Slave Thru mode, Tempest syncs to MIDI clock and forwards incoming MMC and clock messages to the MIDI Out port.

Note: In Slave and Slave Thru modes, if no MIDI clock is present at the selected input, Tempest will not play.

When clock mode is set to Off, MIDI clock is neither transmitted nor received.

2. MIDI: Clock IN Cable: None, MIDI Port, USB—MIDI Clock data from another synthesizer or sequencer can be received through either the MIDI Port or the USB cable. If set to "None" MIDI clock data is ignored.

3. MIDI: Clock OUT Cable: None, MIDI Port, USB, MIDI•USB—MIDI Clock data can be sent out via the MIDI Out port, the USB Port, or both MIDI and USB. If "None" is selected, MIDI clock out is disabled.

System: MIDI System Exclusive

1. MIDI: Sysex IN-OUT Cable: None, MIDI Port, USB—This control allows you to select either the MIDI port or USB connector for MIDI Sysex data transfers. If "None" is selected, Sysex will be neither transmitted nor received.

Note: USB Sysex transfers are only supported with Mac OSX and Windows 7.

System: BPM/Swing/Comp/Dist Sources

1. BPM Source: Project, Beat—Each Beat has its own unique tempo setting (in beats per minute or BPM) but there is also a single tempo setting for the Project. If you wish to use the Beat's tempo setting (and have the tempo change when a different Beat is selected), set this to Beat (factory default). If you wish to use the Project's tempo setting (so that the tempo stays the same regardless of which Beat is playing), select Project. Saving a Beat with BPM Source set to Beat saves the Beat with the current BPM. Saving a Project with BPM Source set to Project saves the Project with the current BPM.

2. Swing Source: Project, Beat—Each Beat has its own unique swing setting (50% to 75%) but there is also a single swing setting for the Project. If you wish to use the Beat's setting (and have the swing amount change when a different Beat is selected), set this to Beat (factory default). If you wish to use the Project's swing setting (so that the swing amount stays the same regardless of which Beat is playing), choose Project. Saving a Beat with Swing Source set to Beat saves the Beat with the current swing setting. Saving a Project with Swing Source set to Project saves the Project with the current swing setting.

3. Compression Source: Project, Beat, Pot Position—Each Beat has its own unique compression setting but there is also a single compression setting for the Project. If you wish to use the Beat's setting (and have the compression amount change when a different Beat is selected), set this to Beat. If you wish to use the Project's swing setting (so that the compression amount stays the same regardless of which Beat is playing), choose Project (factory default). If you wish the Compression setting to always reflect the position of the Compression knob, choose Pot Position. Saving a Beat with Compression Source set to Beat saves the Beat with the current compression setting. Saving a Project with Compression Source set to Project saves the Project with the current compression setting.

4. Distortion Source: Project, Beat, Pot Position—Each Beat has its own unique distortion setting but there is also a single distortion setting for the Project. If you wish to use the Beat's setting (and have the distortion amount change when a different Beat is selected), set this to Beat. If you wish to use the Project's distortion setting (so that the distortion amount stays the same regardless of which Beat is playing), choose Project (factory default). If you wish the distortion setting to always reflect the position of the Distortion knob, choose Pot Position. Saving a Beat with Distortion Source set to Beat saves the Beat with the current distortion setting. Saving a Project with Distortion Source set to Project saves the Project with the current distortion setting.

System: UI Preferences

1. Touch Slider Latch Mode: Active Only, All—When set to Active Only (the default) and LATCH ON is active, the latched slider value is reset to 0 when switching between FX1 and FX3, playing another pad, or switching between 16 SOUNDS and 16 BEATS modes. FX2 and FX4 behave similarly.

When set to All and LATCH ON is active, the slider values stay latched for a given Sound, even when switching among FX1, FX2, FX3, and FX4, playing other pads/Sounds, or switching between 16 SOUNDS and 16 BEATS. Turning latch off resets all latched values to 0.

For details about the touch sliders, see “Real Time FX” on page 35.

2. Latch Button behavior: Normal, Shift Switched, Disabled—In Normal mode, the touch slider remains at the last value when LATCH ON is active.

In Shift Switched mode, the un-shifted and shifted behaviors are swapped. That is, the LATCH ON buttons now switch between FX1 and FX3 or FX2 and FX4. SHIFT + LATCH ON turns latch on and off.

When set to Disabled, the LATCH ON buttons simply switch between FX1 and FX3 or FX2 and FX4 and the latch function is disabled.

For more details about LATCH ON, see “Real Time FX” on page 35.

3. Envelope Amount Encoder behavior: Normal, Shift Switched—In Shift Switched mode, the un-shifted (AMOUNT) and shifted (VELOCITY AMOUNT) behaviors are swapped. That is, when SHIFT is off, the encoder controls VELOCITY AMOUNT and when on, AMOUNT.

4. Select Sound behavior: Shift On + Pad, Shift Held + Pad—The default behavior is SHIFT Held + Pad. To select a Sound for editing without playing the Sound, hold SHIFT down and press the desired pad. When set to Shift Held + Pad, the pads can still be played when SHIFT is on.

When set to Shift On + Pad, SHIFT must either be on or held down to select the Sound.

5. Tap Tempo behavior: Shift On + Play, Shift Held + Play—With Tempest’s default behavior (Shift Held + Play), must be held to tap the tempo. Otherwise, Play starts/restarts the Beat, whether SHIFT is on or not. When set to Shift On + Play, Play is used to tap the tempo when SHIFT is either on or held down.

System: System Actions

- 1. Calibrate Analog Oscillators and Filters:** Tempest's analog waveshapes and filters are calibrated at the factory and should not need to be recalibrated unless you are experiencing problems.
- 2. Calibrate Slider 1 and 2 Position:** Tempest's Sliders are calibrated at the factory and should not need to be recalibrated unless you are experiencing problems.
- 3. Calibrate Drumpads:** Tempest's Sliders are calibrated at the factory and should not need to be recalibrated unless you are experiencing problems.
- 4. Reset System Parameters:** Resets all the system parameters to their default values.
- 5. Show System Information:** Displays the current versions of the operating systems.

Modulation Sources

Pitch Envelope

Filter Envelope

Amp Envelope

Aux 1 Envelope

Aux 2 Envelope

LFO 1

LFO 2

Velocity

Note Number

Noise

Random

Pad Pressure

Slider Position 1

Slider Position 2

Slider Pressure 1

Slider Pressure 2

Foot Pedal 1

Foot Pedal 2

MIDI Pitch Bend

MIDI Mod Wheel

MIDI Breath

MIDI Expression

Modulation Destinations

Osc 1 Frequency	All Env Amount
Osc 2 Frequency	Pitch Env Attack
Osc 3 Frequency	Filter Env Attack
Osc 4 Frequency	Amp Env Attack
Osc All Freq	Aux 1 Env Attack
Osc 1/2 Mix	Aux 2 Env Attack
Osc 3 Level	All Env Attack
Osc 4 Level	Pitch Env Decay
Osc 1 Pulsewidth	Filter Env Decay
Osc 2 Pulsewidth	Amp Env Decay
Osc 1/2 Pulsewidth	Aux 1 Env Decay
Sub Osc Volume	Aux 2 Env Decay
Feedback Volume	All Env Decay
Lowpass Filter	Pitch Env Release
Resonance	Filter Env Release
Filter FM	Amp Env Release
Highpass Filter	Aux 1 Env Release
VCA	Aux 2 Env Release
Pan	All Env Release
LFO 1 Frequency	Mod 1 Amount
LFO 2 Frequency	Mod 2 Amount
LFO All Freq	Mod 3 Amount
LFO 1 Amount	Mod 4 Amount
LFO 2 Amount	Mod 5 Amount
LFO All Amount	Mod 6 Amount
Pitch Env Amount	Mod 7 Amount
Filter Env Amount	Mod 8 Amount
Amp Env Amount	
Aux 1 Env Amount	
Aux 2 Env Amount	

Samples

White Noise	Beefy	Supra Snare
Pink Noise	Flat	Loose Ring
Green Noise	Shorty Thud	Trick Snare Rim
Resonant 4K Noise	SCI Tom Cart Kick	Resonant Loose
Soft Noise	LM-1 Bass Drum	Cool Rim
Cicada	LinnDrum Bass	Another Edge
Buzzed	909ish	Cut Snare
Chain Link	808ish	Muted Half Edge
Grinder	Long Time 808	High Edge
420 HighPass Noise	Cut the Mustard	Cracker
Tight Boom	Electron K	Light Rim
Porky	Flab	Dry Rim
Hollow Thud	Solid	Pickle-O
Hollow Head	Early Nineties	Woody Side
Mid Kick	DigiBonk	Side Stick
Slap Kick	Woosh Kick	Dead Side Stick
Thwang Kick	Dirty Woosh	Sharp Side
Resonant K	Distorted 09	Rim Cut
Boom Kick	Grain Granny	808 Rim
Quickkick	Bit Reduction	909 Rim
Punchy Kick	Back Scatter	AcouStick
Nice	Crunchy	LinnDrum Rim
Short n Sweet	Distorted Bump	Tom Cart Rim
Bumpy	Reversed	SweetDaOneSnare
Loose	Orangey	808ish
Solid Thump	Snare Add Rim	Quickie
Upfront	Mid Head	Short n Tight
Good Kick	Acoustic	High Short
Metallic	Good Hit	30 Day Snare
Square	Some Head	Fat 9009

Funk Sn	Noisy Click	Close Foot Pedal
LM-1 Snare	Splatted Snare	LM-1 Closed
LinnDrum SD	Broken SD	LM-1 Open
Basicly	Ghost of a Snare	LinnDrum HH Closed
Beatbox	Video Game	LinnDrum HH
Machine	Caved Perc	LinnDrum HH Open
Twin	Reverse Snare	Close Tambo
Dry	Edge Heavy	Tight Studio Hat
Short Attack	Pedal Edge	Crack Hat
Digi 8	Pedaled AM	Accent
CompuSnare	Half Edge	HH Dub Plate
Plastic	Open Edge	Dry Tap
Snare Trash	Sharp Closed	Peace Corp
Bucket	Sharp Pedal	Old Timer
Toy Drum	Sharp Half	Blu Pedal
Abrupt	Sharp Open	Fake
What Snare?	Zilch Closed	Open Fat
Canned	Zilch Pedal	Abrasive
Dead Lid	Zilch Open	Tic Tac
Tom Cart SD	Pastey	Noise Hat
Classic	Pastey Half	Reversed
DR55 SD	Heavy Closed	Dirty Pedal
Cold hit	Heavy Open	Barely There
Zippy Thwack	Boss Closed	Click
Crumbly	Boss Open	Quiet
70s Snare	Dark Cl	Shorty HH
Bit Reduce SD	Dark Opn	One Foot Pedal
Distant	Amazon Closed	8080 HH
Filtered SD	Amazon Half	8080 Open
Oil Can	Trash Hat	808ish Maraca
Digital Sweetness	Loose Open Hat	9009 HH

9009 HH2	LinnDrum Ride	808ish Hi Tom
Perc Hat	909ish Crash	808ish Mid Tom
DR55 HH	Tom Splash Cart	808ish Low Tom
Right Foot Pedal	Reverse CY	909ish Tom Hi
Another Perc	Res Hi	909ish Tom Mid
Closing HH	Res Mid	909ish Tom Low
Small Hi Hat	Res Floor	Reverse Hi
Unnatural	Nice Hi	Reverse Mid
Trip Hop HH	Nice Mid	Reverse Low
Aliens	Nice Floor	Clap 9090
Silver HH	Punchy Hi	Layered Clap
Kicky Hi Hat	Punchy Mid	Slap Clap
Large Edge Cymbal	Punchy Low	Digi Clap
Zilch Crash	Hi Maple	NotDisClap
Gong	Mid Maple	PerClapsaLot
Pastey Hit	Low Maple	LM-1 Clap
45 Degree Dust	Blue Tom Hi	LinnDrum Clap
Bell Crash	Blue Tom Lo	808ish
Oriental Hit	Tonic Tom Hi	9090
Higher Cymbal	Tonic Tom Low	Reverse Clap
No Name Crash	Acoustic Hi	How Now
909ish	Acoustic Low	Real Cow
LinnDrum Crash	Tom Splat	Tang Cowbell
808ish Crash	Thudd Tom	Dinky Cow
Hertz Cymbal	Wood World	Short Cow
Flat Ride	SCI Tom Cart	80s Cowbell
Medium Bell	LM-1 Hi Tom	LM-1 CowB
Blue High Ride	LM-1 Lo Tom	LinnDrum CowB
Small Gong	LinnDrum TomHi	OG 808 Cow
Smooth Ride	LinnDrum TomMid	Reverse Cowbell
Shortcut	LinnDrum TomLo	Cross Stick

Light Cross	808ish Lo Conga	Punch n Drag
Low Cross	LM-1 CongaHi	Nutrino
Jam Block H	LM-1 CongaLo	Solar Explosion
Jam Block L	LinnDrum Conga	Wrinkled
Keys	Tambourine	Quark
Guiro	Tambo Ring	Particulate
Castanet	TamBell	Hadron
Drag That Click	Metal Tamb	Flutter
Moon Golf	Wood Tamb	Broken Toy
Real Shaker	LM-1 Tamb	Click Reduction
Cabasa A	LinnDrum Tamb	Fazzle
Cabasa B	Raucous Tamb	Grunt
LM-1 Cabasa	Tri HiFi	Bucket Bottom
LinnDrum Cabasa	Short Triangle	Charged Porceline
Real Fingers	Noisy Bell	Brrrrr
Cute Drum Robot	Flexi A	Shorted
Digi Click	Flexi B	BeatBox
Bit-o-Clap	Stick on Metal	Tap That
Hot Tabla Lo	Clank	Boxer2
Hot Tabla Mid	Sounds Like?	Flat Perc
Hot Tabla Hi	Abrupt Metal	Flat Click
Hot Tabla Highest	808ish Clave	Filtered Perc
Tabla Bounce	Rico Clave	Vacant
Udu Bounce	Phazey Click	Hybrid Click
Udu u Do 1	Coming Up	SCI Tom Cart Laser
Udu u Do 2	Choked Perc	SCI Tom Scratch
What Conga	Hollow Box Lid	Needle On
Conga 1	Oil Drum	Outta Time
Conga 2	Canned Perc	Sine 130.81 Hz
Conga 3	Half Full	Sine
808ish Hi Conga	Pla-stick	Sawtooth

Square	Orient	Corn
WmBell	HighPipe	Flute 2
RdBell	Mass	Med Pure
R2Bell	ReedOrg	Tuba
W2Bell	OrgAhh	FullBell
FmtBell	MelOrg	Bell
FzReed	Clarinet	Pinch
FmtAOh	AhhFem	Clustr
FmtAhh	AhhHom	M.Pinch
Banjo1	AhhBass	VoxPnch
TriPlus	RegVox	OrgPnch
DisBel	Vocal1	AhhPnch
Pulse2	Vocal2	PnoOrg
Pulse3	Harmony	BrReed
SqrReed	Bass	NoFund
Oohh	Guitar	ReedHrm
Eehh	Nice	LiteFund
Feedback	WWind	MelOrg
Piano1	Oboe	Bell Partial 1
E.Pno	Harp	Bell
M.Harm	Pipe	VS 84
VS 23	Hack1	VS 85
HiTop	Hack2	VS 86
WmReed	Hack3	VS 87
VS 26	Pinch	VS 88
Hollow	BellHrm	VS 89
BellOrg	BellVox	VS 90
BassBell	Hi Harm	VS 91
Tine1	Hi Reed	VS 92
SynBell	BellReed	Piano2
VS 32	WmWhistl	Bell Partial 2
		VS 95

Support

Troubleshooting

Here are a few suggestions for resolving problems that may occur.

The sequencer has stopped running.

Make sure MIDI: Clock Mode in the System menu is set to Auto, Master, or Off, or—if set to Slave—that MIDI: Clock In is set to MIDI Port or USB and that MIDI clock is actually available to that port.

An oscillator or filter sounds strange or out of tune.

In the System menu, choose Calibrate Analog Oscillators and Filters.

Note: It is not necessary to run the calibration routine on a regular basis. You should only run it if you are experiencing problems.

The Real Time FX sliders are not behaving as expected or don't seem to go full range.

In the System menu, choose Calibrate Slider 1 and Slider 2 Position and follow the instructions to calibrate the sliders.

Still experiencing a problem?

From the System menu, choose Reset System Parameters.

Contacting Technical Support

If you are still having a problem with Tempest, contact Technical Support at support@davesmithinstruments.com. Please include your Tempest's serial number, the versions of the operating systems (from the System menu, choose Show System Information), and the purchase date.

Note: If you have not already reset the Global parameters and run the calibration routine (see “Troubleshooting,” above), you should do it before contacting Technical Support. It's probably the first thing they'll ask you to do.

Warranty Repair

Dave Smith Instruments warrants that Tempest will be free from defects in materials and/or workmanship for 1 year from the date of purchase. Please register your product online at www.davesmithinstruments.com to establish the date of purchase. (This is not a requirement for warranty service, but it will help expedite the process.)

Please contact support@davesmithinstruments.com to determine the best course of action for getting your Tempest repaired. For your own protection, as well as ours, please do not return any product to Dave Smith Instruments without a return authorization (RA) number. To issue an RA number, Technical Support needs:

- Your name
- Your return address
- Your email address
- A phone number where you can be reached
- Your Tempest's serial number
- The date of purchase and where purchased

If you need to return your instrument for repair, you are responsible for getting it to DSI. We strongly suggest insuring it and packing in the original packaging. Damage resulting from shipping a product with insufficient packaging is not covered by warranty.

**Dave Smith Instruments
1527 Stockton Street, 2nd Floor
San Francisco, CA 94133
USA**

www.DaveSmithInstruments.com

DSI-807R 5-21